

VPU AC I F 0 275/25**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold


Germany

www.weidmueller.com

Product image

Abb.ähnlich

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. The VPU AC I F series is characterised by a fuse integrated in the arrester. These arresters do not require a fuse.

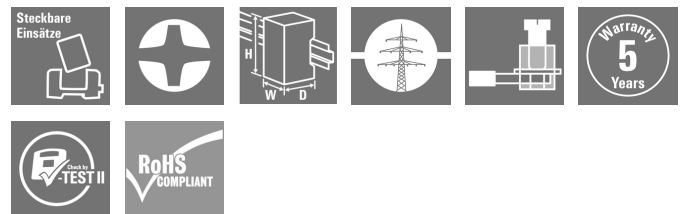**General ordering data**

Version	Surge voltage arrester, Low voltage, Surge protection
Order No.	2859350000
Type	VPU AC I F 0 275/25
GTIN (EAN)	4064675570578
Qty.	1 pc(s).

VPU AC I F 0 275/25

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	80 mm	Depth (inches)	3.15 inch
Height	45 mm	Height (inches)	1.772 inch
Width	36 mm	Width (inches)	1.417 inch
Net weight	198 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

General data

Number of poles	1	Protection degree	IP20 in installed state
Colour	orange		

Rated data IEC / EN

Discharge current I_{max} (8/20µs) wire-PE	65 kA	Discharge current I_n (8/20µs) wire-PE	25 kA
Energy coordination (≤ 10 m)	Type I, Type II, Type III	Frequency range, max.	60 Hz
Frequency range, min.	50 Hz	Fuse	Not required, internally available
Integrated back-up fuse	Yes	Lightning test current I_{imp} (10/350 µs) (L-PE)	25 kA
Mains voltage	230 V / 400 V	Max. continuous voltage, U_c (AC)	275 V
Number of poles	1	Rated voltage (AC)	240 V
Requirements category acc. to IEC 61643-11	Type I, Type II	Requirements class, acc. to EN 61643-11	T1, T2
Response time	<100 ns	Short-circuit current rating I_{SCCR}	75 kA
Standards	EN 61643-11, IEC 61643-11	Suitable for	Count-in installation (leakage current free)
Temporary surge voltage (over-voltage) - TOV	442 V	Voltage type	AC

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

Electrical data

Voltage type	AC
--------------	----

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ETIM 9.0	EC000941
ETIM 10.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90
ECLASS 13.0	27-17-90-90	ECLASS 14.0	27-17-90-90
ECLASS 15.0	27-17-90-90		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Creation date May 11, 2025 10:25:51 PM CEST

VPU AC I F 0 275/25**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Important note**

Product information	If F1 > 315A gG, then the integrated backup fuse always operates before F1
Notes	Additional tests for 100kA I _{sc} have been passed without certification.

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU AC I F 0 275/25

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol



Schematic circuit diagram

VPU AC I F 0 275/25

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Slotted screwdriver



VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

General ordering data

Type	SDIS 1.0X5.5X125	Version
Order No.	2749850000	Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade
GTIN (EAN)	4050118897050	thickness (A): 1 mm
Qty.	1 pc(s).	

VPU Busbar



General ordering data

Type	VPU AC FB 16-4
Order No.	2904380000
GTIN (EAN)	4099986009790
Qty.	10 pc(s).

Type	VPU AC FB 16-2
Order No.	2904360000
GTIN (EAN)	4099986009769
Qty.	10 pc(s).

Type	VPU AC FB 16-7
Order No.	2904400000
GTIN (EAN)	4099986009813
Qty.	10 pc(s).

Type	VPU AC FB 16-3
Order No.	2904370000
GTIN (EAN)	4099986009783
Qty.	10 pc(s).

Type	VPU AC FB 16-6
Order No.	2904390000
GTIN (EAN)	4099986009806
Qty.	10 pc(s).

VPU AC I F 0 275/25**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Crosshead screwdriver Phillips**

VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

General ordering data

Type	SDIK PH1 X 80	Version
Order No.	2749890000	Screwdriver, Blade width (B): 1 mm, 80 mm, Blade thickness (A): 1
GTIN (EAN)	4050118897098	
Qty.	1 pc(s).	