

**HDC 24B TSLU 1M32G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                                                                                                                                                                                    |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 32 |
| Order No.  | <a href="#">1787790000</a>                                                                                                                                                         |
| Type       | HDC 24B TSLU 1M32G                                                                                                                                                                 |
| GTIN (EAN) | 4032248205233                                                                                                                                                                      |
| Qty.       | 1 pc(s).                                                                                                                                                                           |

## HDC 24B TSLU 1M32G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |       |                 |            |
|------------|-------|-----------------|------------|
| Height     | 61 mm | Height (inches) | 2.402 inch |
| Width      | 46 mm | Width (inches)  | 1.811 inch |
| Net weight | 272 g |                 |            |

## Temperatures

|                   |                   |
|-------------------|-------------------|
| Limit temperature | -40 °C ... 125 °C |
|-------------------|-------------------|

## Dimensions

|                      |           |                     |       |
|----------------------|-----------|---------------------|-------|
| Cable entry          | w. thread | Height of housing B | 63 mm |
| Total length housing | 120 mm    | Width housing C     | 43 mm |

## General data

|                             |                             |                       |                             |
|-----------------------------|-----------------------------|-----------------------|-----------------------------|
| EMC housings                | No                          | Housing main material | diecast aluminium           |
| Material of locking element |                             | Protection degree     | IP65 (in plugged condition) |
| Surface finish              | Stainless steel, rust-proof |                       |                             |
|                             | Powder coating              |                       |                             |

## Version

|                              |                               |                                |                                     |
|------------------------------|-------------------------------|--------------------------------|-------------------------------------|
| BG                           | 8                             | Cable entry                    | w. thread                           |
| Clamp version                | End-locking clamp             | Colour (RAL)                   | RAL 7035                            |
| Design                       |                               | Design of housing              | Cable entry from side, Plug housing |
|                              | Standard                      |                                |                                     |
| Design of locking system     | End-locking clamp, lower side | Internal thread                | M 32                                |
| Number of cable entry on top | 0                             | Number of cable entry sideways | 1                                   |
| Size                         | 8                             | Size of cable entries          | M 32                                |
| Suitable for ModuPlug®       | No                            | Top part/bottom part/lid       | upper part                          |
| Type                         | Plug                          |                                |                                     |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000437    | ETIM 7.0    | EC000437    |
| ETIM 8.0    | EC000437    | ETIM 9.0    | EC000437    |
| ETIM 10.0   | EC000437    | ECLASS 9.0  | 27-44-02-02 |
| ECLASS 9.1  | 27-44-02-02 | ECLASS 10.0 | 27-44-02-02 |
| ECLASS 11.0 | 27-44-02-02 | ECLASS 12.0 | 27-44-02-02 |
| ECLASS 13.0 | 27-44-02-02 | ECLASS 14.0 | 27-44-02-02 |
| ECLASS 15.0 | 27-44-02-02 |             |             |

|                     |                         |
|---------------------|-------------------------|
| Substance           | Acetone                 |
| Chemical resistance | Conditionally resistant |
| Substance           | Drilling oil            |
| Chemical resistance | Resistant               |
| Substance           | Diesel                  |
| Chemical resistance | Resistant               |
| Substance           | Ethyl alcohol           |
| Chemical resistance | Resistant               |

## HDC 24B TSLU 1M32G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                     |                         |
|---------------------|-------------------------|
| Substance           | Transmission oil        |
| Chemical resistance | Resistant               |
| Substance           | Hydraulic oil           |
| Chemical resistance | Resistant               |
| Substance           | Coolant                 |
| Chemical resistance | Resistant               |
| Substance           | Petroleum benzine       |
| Chemical resistance | Resistant               |
| Substance           | Sweat                   |
| Chemical resistance | Resistant               |
| Substance           | Premium gasoline        |
| Chemical resistance | Conditionally resistant |
| Substance           | Water                   |
| Chemical resistance | Resistant               |
| Substance           | UV                      |
| Chemical resistance | Unstable                |
| Substance           | Ozone                   |
| Chemical resistance | Unstable                |

## Environmental Product Compliance

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RoHS Compliance Status | Compliant without exemption                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| REACH SVHC             | No SVHC above 0.1 wt%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Chemical resistance    | de.myview.objectmodel.impl.BlockImpl@152da297 de.myview.objectmodel.impl.BlockImpl@509e9914<br>de.myview.objectmodel.impl.BlockImpl@7f124f68 de.myview.objectmodel.impl.BlockImpl@1e0cd2a6<br>de.myview.objectmodel.impl.BlockImpl@664de2ea de.myview.objectmodel.impl.BlockImpl@423f910e<br>de.myview.objectmodel.impl.BlockImpl@2f3bef2e de.myview.objectmodel.impl.BlockImpl@575a818d<br>de.myview.objectmodel.impl.BlockImpl@5e89633e de.myview.objectmodel.impl.BlockImpl@60002e00<br>de.myview.objectmodel.impl.BlockImpl@1032efb1 de.myview.objectmodel.impl.BlockImpl@13e742d3<br>de.myview.objectmodel.impl.BlockImpl@6e24302 |

## Approvals

Approvals



|                         |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                                                                                                                                                                                                 |
| UL File Number Search   | UL Website                                                                                                                                                                                                                                                                                                                                              |
| Certificate No. (cURus) | E92202                                                                                                                                                                                                                                                                                                                                                  |

### HDC 24B TSLU 1M32G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1787790000 HDC\\_24B\\_TSLU\\_1M32G\\_STP\\_Blatt\\_1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)

[FL FIELDWIRING EN](#)

### HDC 24B TSLU 1M32G

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

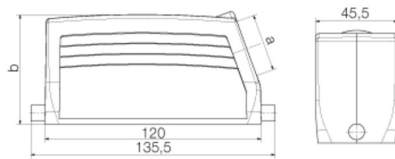

**HDC 24B TSLU 1M32G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Cover**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

|            |                            |                                                                                                                                                      |
|------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | HDC 24B DMDQ 4BO           | Version                                                                                                                                              |
| Order No.  | <a href="#">1665650000</a> | HDC enclosures, Size: 8, Protection degree: IP65 (in plugged condition), Cover for upper part of housing, Side-locking clamp on upper side, Standard |
| GTIN (EAN) | 4008190422677              |                                                                                                                                                      |
| Qty.       | 1 pc(s).                   |                                                                                                                                                      |