


**HTTB 6 PE DL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

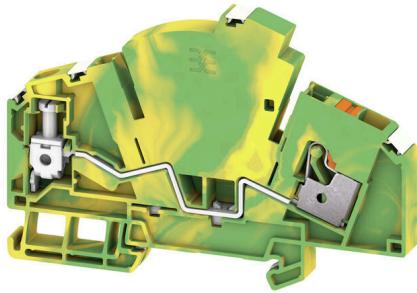

In T&D applications, current and voltage transformers are mainly used for protection and measurement functions. Our TTB range of Klippon® Connect instrument transformer terminal blocks have been designed to meet all the connection requirements of these two critical applications. The wiring of current and voltage transformers can be carried out particularly easily and safely with the new terminal block series – even within complex circuits. The prevention of operating errors during operation increases plant availability and extends the life cycle of the entire control cabinet. Thus, the respective requirements of the end user are fulfilled to the highest degree.

**General ordering data**

Version	PE terminal, PUSH IN, 6 mm <sup>2</sup> , Green/yellow
Order No.	<a href="#">2792470000</a>
Type	HTTB 6 PE DL
GTIN (EAN)	4064675074342
Qty.	50 items

## HTTB 6 PE DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (cURus) E60693

## Dimensions and weights

Depth	68 mm	Depth (inches)	2.6772 inch
Height	100 mm	Height (inches)	3.937 inch
Width	8.1 mm	Width (inches)	0.3189 inch
Net weight	34.94 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-60 °C...85 °C
Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C

## Environmental Product Compliance

RoHS Compliance Status Compliant without exemption

REACH SVHC No SVHC above 0.1 wt%

## Material data

Basic material	Wemid	Colour	Green/yellow
Colour of operational elements	orange	UL 94 flammability rating	V-0

## System specifications

End cover plate required	Yes	Number of potentials	1
Number of levels	1	Number of clamping points per level	2
Number of potentials per tier	1	Mounting rail	TS 35
N-function	No	PE function	Yes
PEN function	No		

## Additional technical data

Open sides	right	Snap-on	Yes
Explosion-tested version	No	Type of mounting	Snap-on

## CSA rating data

Wire cross section max. (CSA)	8 AWG	Certificate No. (CSA)	200039-80099474
Wire cross section min. (CSA)	22 AWG		

## Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

HTTB 6 PE DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Gauge to IEC 60947-1	A4	Wire connection cross section AWG, max.	AWG 8
Connection direction	on side, top	Tightening torque, max.	1.6 Nm
Tightening torque, min.	0.8 Nm	Stripping length	12 mm
Type of connection 2	Screw connection	Type of connection	PUSH IN
Number of connections	2	Clamping range, max.	10 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Blade size	0.8 x 4.0 mm
Wire connection cross section AWG, min.	AWG 22	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	10 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	10 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	0.5 mm <sup>2</sup>	Connection cross-section, stranded, max.	10 mm <sup>2</sup>
Connection cross-section, stranded, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, solid core, max.	10 mm <sup>2</sup>
Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>	Connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>

General

Wire connection cross section AWG, max.	AWG 8	Wire connection cross section AWG, min.	AWG 22
Standards	IEC 60947-7-1	Mounting rail	TS 35

Rating data

Rated cross-section	6 mm <sup>2</sup>	Rated voltage to adjoining terminal	500 V
Rated DC voltage	500 V	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	0.78 mΩ	Rated impulse withstand voltage	6 kV
Surge voltage category	III	Pollution severity	3


UL rating data

Conductor size Factory wiring max. (cURus)	8 AWG	Certificate No. (cURus)	E60693
Conductor size Field wiring min. (cURus)	22 AWG	Conductor size Factory wiring min. (cURus)	22 AWG
Conductor size Field wiring max. (cURus)	8 AWG		

Classifications

ETIM 8.0	EC000901	ETIM 9.0	EC000901
ETIM 10.0	EC000901	ECLASS 14.0	27-25-01-03
ECLASS 15.0	27-25-01-03		

Drawings



## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

## Accessorie



The comprehensive accessories of the Klippon® Connect TTB-Range are perfectly matched down to the last detail. This facilitates mounting while adhering to required norms. All function- and safety-relevant components are captively connected to the terminal block. This increases the reliability of the current and voltage transformer circuits during installation and maintenance work.

## General ordering data

Type	TS TTB 6 BK	Version
Order No.	<a href="#">2710520000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118881080	
Qty.	48 ST	
Type	TS TTB 6 BL	Version
Order No.	<a href="#">2710480000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118880656	
Qty.	48 ST	
Type	TS TTB 6 BR	Version
Order No.	<a href="#">2715540000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118769609	
Qty.	48 ST	
Type	TS TTB 6 GN	Version
Order No.	<a href="#">2710490000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118880953	
Qty.	48 ST	
Type	TS TTB 6 OR	Version
Order No.	<a href="#">2710470000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118880649	
Qty.	48 ST	
Type	TS TTB 6 RD	Version
Order No.	<a href="#">2710510000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118881073	
Qty.	48 ST	
Type	TS TTB 6 VT	Version
Order No.	<a href="#">2710530000</a>	Socket (terminal), Plug-in depth: 11.5 mm, 0.00 mm, Depth: 51.3 mm
GTIN (EAN)	4050118881097	
Qty.	48 ST	
Type	TS TTB 6 WT	Version
Order No.	<a href="#">2817250000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4064675322566	
Qty.	48 ST	
Type	TS TTB 6 YL	Version
Order No.	<a href="#">2710500000</a>	Socket (terminal), Plug-in depth: 11.5 mm, Depth: 51.3 mm
GTIN (EAN)	4050118881066	
Qty.	48 ST	
Type	SL TTB 6	Version
Order No.	<a href="#">2710220000</a>	Lockout device (terminal), PA 66/6, red
GTIN (EAN)	4050118893311	
Qty.	50 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	LL TTB 6/1	Version
Order No.	<a href="#">2710230000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847925	
Qty.	50 ST	
Type	LL TTB 6/1 BK	Version
Order No.	<a href="#">2710280000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847963	
Qty.	50 ST	
Type	LL TTB 6/1 BL	Version
Order No.	<a href="#">2710240000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847918	
Qty.	50 ST	
Type	LL TTB 6/1 BR	Version
Order No.	<a href="#">2762590000</a>	Locking lever (terminal)
GTIN (EAN)	4064675018377	
Qty.	50 ST	
Type	LL TTB 6/1 GN	Version
Order No.	<a href="#">2710250000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847949	
Qty.	50 ST	
Type	LL TTB 6/1 RD	Version
Order No.	<a href="#">2710270000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847956	
Qty.	50 ST	
Type	LL TTB 6/1 VT	Version
Order No.	<a href="#">2710290000</a>	Locking lever (terminal)
GTIN (EAN)	4050118847970	
Qty.	50 ST	
Type	LL TTB 6/1 WT	Version
Order No.	<a href="#">2817220000</a>	Locking lever (terminal)
GTIN (EAN)	4064675322535	
Qty.	50 ST	
Type	LL TTB 6/1 YL	Version
Order No.	<a href="#">2710260000</a>	Locking lever (terminal)
GTIN (EAN)	4050118893335	
Qty.	50 ST	
Type	LL TTB 6/2	Version
Order No.	<a href="#">2710300000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848243	
Qty.	50 ST	
Type	LL TTB 6/2 BK	Version
Order No.	<a href="#">2710350000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848274	
Qty.	50 ST	
Type	LL TTB 6/2 BL	Version
Order No.	<a href="#">2710310000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848250	
Qty.	50 ST	
Type	LL TTB 6/2 BR	Version
Order No.	<a href="#">2762600000</a>	Locking lever (terminal)
GTIN (EAN)	4064675018384	
Qty.	50 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	LL TTB 6/2 CM	Version
Order No.	<a href="#">2710370000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012092	
Qty.	50 ST	
Type	LL TTB 6/2 CM BK	Version
Order No.	<a href="#">2710420000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012641	
Qty.	50 ST	
Type	LL TTB 6/2 CM BL	Version
Order No.	<a href="#">2710380000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012603	
Qty.	50 ST	
Type	LL TTB 6/2 CM BR	Version
Order No.	<a href="#">2762610000</a>	Locking lever (terminal)
GTIN (EAN)	4064675018391	
Qty.	50 ST	
Type	LL TTB 6/2 CM GN	Version
Order No.	<a href="#">2710390000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012610	
Qty.	50 ST	
Type	LL TTB 6/2 CM RD	Version
Order No.	<a href="#">2710410000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012634	
Qty.	50 ST	
Type	LL TTB 6/2 CM VT	Version
Order No.	<a href="#">2710430000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012658	
Qty.	50 ST	
Type	LL TTB 6/2 CM WT	Version
Order No.	<a href="#">2817240000</a>	Locking lever (terminal)
GTIN (EAN)	4064675322559	
Qty.	50 ST	
Type	LL TTB 6/2 CM YL	Version
Order No.	<a href="#">2710400000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012627	
Qty.	50 ST	
Type	LL TTB 6/2 GN	Version
Order No.	<a href="#">2710320000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848328	
Qty.	50 ST	
Type	LL TTB 6/2 RD	Version
Order No.	<a href="#">2710340000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848281	
Qty.	50 ST	
Type	LL TTB 6/2 VT	Version
Order No.	<a href="#">2710360000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848267	
Qty.	50 ST	
Type	LL TTB 6/2 WT	Version
Order No.	<a href="#">2817230000</a>	Locking lever (terminal)
GTIN (EAN)	4064675322542	
Qty.	50 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	LL TTB 6/2 YL	Version
Order No.	<a href="#">2710330000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848311	
Qty.	50 ST	
Type	LL TTB 6/3	Version
Order No.	<a href="#">2710440000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848236	
Qty.	50 ST	
Type	LL TTB 6/3 CM	Version
Order No.	<a href="#">2726100000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012665	
Qty.	50 ST	
Type	LL TTB 6/4	Version
Order No.	<a href="#">2710450000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848229	
Qty.	25 ST	
Type	LL TTB 6/4 CM	Version
Order No.	<a href="#">2726110000</a>	Locking lever (terminal)
GTIN (EAN)	4064675012672	
Qty.	50 ST	
Type	LL TTB 6/6	Version
Order No.	<a href="#">2710460000</a>	Locking lever (terminal)
GTIN (EAN)	4050118848212	
Qty.	10 ST	

## End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

## General ordering data

Type	EP TTB 6	Version
Order No.	<a href="#">2710170000</a>	A-series, End plate
GTIN (EAN)	4050118822229	
Qty.	20 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

## End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

Type	AEB 35 SCL/1 V0	Version
Order No.	<a href="#">2661280000</a>	A-series, End bracket
GTIN (EAN)	4050118702163	
Qty.	20 ST	
Type	AEB 35 SCL/1 V0 BK	Version
Order No.	<a href="#">2661300000</a>	A-series, End bracket
GTIN (EAN)	4050118702187	
Qty.	20 ST	
Type	AEB 35 SCL/1 V0 GY	Version
Order No.	<a href="#">2661290000</a>	A-series, End bracket
GTIN (EAN)	4050118702170	
Qty.	20 ST	

## Accessorie



The comprehensive accessories of the Klippon® Connect TTB-Range are perfectly matched down to the last detail. This facilitates mounting while adhering to required norms. All function- and safety-relevant components are captively connected to the terminal block. This increases the reliability of the current and voltage transformer circuits during installation and maintenance work.

## General ordering data

Type	SCCB TT6 6/2	Version
Order No.	<a href="#">2710190000</a>	Cross-connector (terminal), Plugged, orange, 30 A, Number of poles:
GTIN (EAN)	4050118847987	2, Pitch in mm (P): 8.10, Insulated: Yes, Width: 16 mm
Qty.	25 ST	
Type	SCCB TT6 6/3	Version
Order No.	<a href="#">2710200000</a>	Cross-connector (terminal), Plugged, orange, 30 A, Number of poles:
GTIN (EAN)	4050118847994	3, Pitch in mm (P): 8.10, Insulated: Yes, Width: 24.1 mm
Qty.	25 ST	
Type	SCCB TT6 6/4	Version
Order No.	<a href="#">2710210000</a>	Cross-connector (terminal), Plugged, orange, 30 A, Number of poles:
GTIN (EAN)	4050118848007	4, Pitch in mm (P): 8.10, Insulated: Yes, Width: 32.2 mm
Qty.	25 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

### Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

### General ordering data

Type	ZQV 6N/10	Version
Order No.	<a href="#">2733970000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4064675066811	10, Pitch in mm (P): 8.00, Insulated: Yes, Width: 3.1 mm
Qty.	20 ST	
Type	ZQV 6N/6	Version
Order No.	<a href="#">2733950000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4064675066699	6, Pitch in mm (P): 8.00, Insulated: Yes, Width: 3.1 mm
Qty.	20 ST	
Type	ZQV 6N/7	Version
Order No.	<a href="#">2733960000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4064675066804	7, Pitch in mm (P): 8.00, Insulated: Yes, Width: 3.1 mm
Qty.	20 ST	

### Accessorie



The comprehensive accessories of the Klippon® Connect TTB-Range are perfectly matched down to the last detail. This facilitates mounting while adhering to required norms. All function- and safety-relevant components are captively connected to the terminal block. This increases the reliability of the current and voltage transformer circuits during installation and maintenance work.

### General ordering data

Type	CH TTB	Version
Order No.	<a href="#">2710130000</a>	Cover hood (terminal)
GTIN (EAN)	4064675021155	
Qty.	1 ST	
Type	CP TTB	Version
Order No.	<a href="#">2710140000</a>	Cover hood (terminal)
GTIN (EAN)	4064675014171	
Qty.	10 ST	
Type	CS TTB	Version
Order No.	<a href="#">2710150000</a>	A-series, End bracket
GTIN (EAN)	4064675021148	
Qty.	10 ST	

## HTTB 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

## Accessories

www.weidmueller.com

## DEK 5/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

Type	DEK-A 5/8 MM WS	Version	
Order No.	<a href="#">2448860000</a>	Dekafix, Terminal marker, 5 x 8.1 mm, Weidmueller, white	
GTIN (EAN)	4050118462968		
Qty.	500 ST		

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
  - Strips for fast installation
  - Terminal markers, suitable for all Weidmüller cable connectors
  - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	DEK 5/8-11.5 MC NE WS	Version	
Order No.	<a href="#">1341630000</a>	Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00	
GTIN (EAN)	4050118145946	Weidmueller, white	
Qty.	500 ST		

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Accessories

www.weidmueller.com

### Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

### General ordering data

Type	ZQV 6N/10 BL	Version
Order No.	<a href="#">2786910000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 10,
GTIN (EAN)	4064675064602	Pitch in mm (P): 8.00, Insulated: Yes, Width: 78.7 mm
Qty.	20 ST	
Type	ZQV 6N/2	Version
Order No.	<a href="#">1985740000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4050118370362	2, Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm
Qty.	60 ST	
Type	ZQV 6N/3	Version
Order No.	<a href="#">1985760000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4050118370263	3, Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm
Qty.	60 ST	
Type	ZQV 6N/3 BL	Version
Order No.	<a href="#">1985840000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 3,
GTIN (EAN)	4050118370379	Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm
Qty.	60 ST	
Type	ZQV 6N/4	Version
Order No.	<a href="#">1985780000</a>	Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:
GTIN (EAN)	4050118370287	4, Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm
Qty.	60 ST	
Type	ZQV 6N/4 BL	Version
Order No.	<a href="#">1985850000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 4,
GTIN (EAN)	4050118370447	Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm
Qty.	60 ST	
Type	ZQV 6N/6 BL	Version
Order No.	<a href="#">2786890000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 6,
GTIN (EAN)	4064675064572	Pitch in mm (P): 8.00, Insulated: Yes, Width: 46.3 mm
Qty.	20 ST	
Type	ZQV 6N/7 BL	Version
Order No.	<a href="#">2786900000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 7,
GTIN (EAN)	4064675064596	Pitch in mm (P): 8.00, Insulated: Yes, Width: 54.4 mm
Qty.	20 ST	
Type	ZQV 6N/2 BL	Version
Order No.	<a href="#">1985830000</a>	Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 2,
GTIN (EAN)	4050118370232	Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm
Qty.	60 ST	

## HTTB 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

## Accessories

[www.weidmueller.com](http://www.weidmueller.com)

### Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

### General ordering data

Type	FZS 2/4 RT/80 SAKT4	Version	
Order No.	<a href="#">1276300000</a>	Plug (terminal), Plug-in connection, 2 mm <sup>2</sup> , Number of connections: 2,	
GTIN (EAN)	4008190026080	Number of poles: 1, Width: 9 mm	
Qty.	20 ST		