


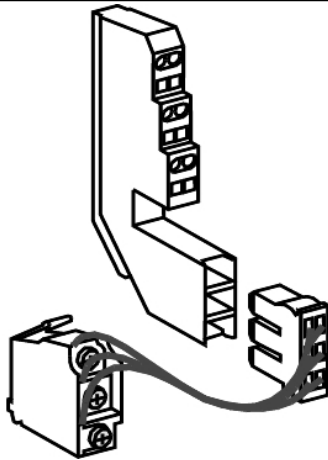

Hoofd

Product or component type	Hulpcontact
Device short name	OF
Bereik compatibiliteit	Masterpact Masterpact NT
Samenstelling signaleringscontacten	1 NO/NC

Complementair

Type hulpcontacten	Laag niveau
Mounting mode	Uittrekken
Onderbrekingsvermogen (A)	DC-12: 2,5 A at 48 V DC DC-12: 5 A at 24 V DC AC-12: 5 A at 24/48 V AC 50/60 Hz AC-12: 5 A at 240 V AC 50/60 Hz AC-12: 5 A at 380 V AC 50/60 Hz
Minimale belasting	2 mA bij 15 V

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2,0 cm
Package 1 Width	6,0 cm
Package 1 Length	14,0 cm
Package 1 Weight	34,0 g

Duurzaamheid van het aanbod

REACH-regelgeving	 REACH-verklaring
EU-richtlijn RoHS	Voldoet aan vrijstellingen
Kwikvrij	Ja
RoHS-regulering China	 RoHS-verklaring China
Informatie over RoHS-vrijstelling	 Ja

contractuele waarborg

Garantie	18 months
----------	-----------