


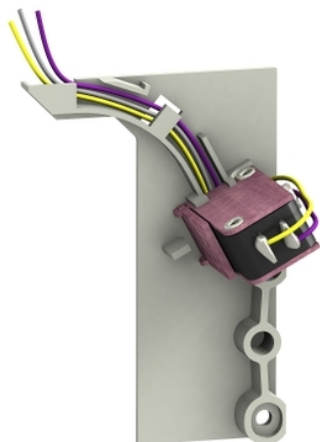

Hoofd

Range of product	Compact nsx400...630 Compact nsx400...630 DC
Range	Compact
Device short name	early-break contact
Product or component type	Hulpcontact
Device application	Controle
Bereik compatibiliteit	Compact Compact nsx400 Compact Compact nsx630 Compact Compact NSX400 DC Compact Compact NSX630 DC PowerPact POWERPACT L

Complementair

Type hulpcontacten	Standaard
Werking hulpcontacten	Vroeg afvallend
Mounting mode	Uittrekken
Ith conventionele thermische stroom in vrije lucht	6 A
Ie toegekende bedrijfstrom	AC-12: 6 A bij 110 V AC 50/60 Hz AC-12: 6 A bij 220/240 V AC 50/60 Hz AC-12: 6 A bij 24 V AC 50/60 Hz AC-12: 6 A bij 380/440 V AC 50/60 Hz AC-12: 6 A bij 48 V AC 50/60 Hz AC-12: 6 A bij 480 V AC 50/60 Hz AC-12: 6 A bij 660/690 V AC 50/60 Hz AC-15: 0,1 A bij 660/690 V AC 50/60 Hz AC-15: 1,5 A bij 480 V AC 50/60 Hz AC-15: 2 A bij 380/440 V AC 50/60 Hz AC-15: 4 A bij 220/240 V AC 50/60 Hz AC-15: 5 A bij 110 V AC 50/60 Hz AC-15: 6 A bij 24 V AC 50/60 Hz AC-15: 6 A bij 48 V AC 50/60 Hz DC-12: 0,3 A bij 250 V DC DC-12: 0,6 A bij 110 V DC DC-12: 2,5 A bij 48 V DC DC-12: 6 A bij 24 V DC DC-14: 0,03 A bij 250 V DC DC-14: 0,05 A bij 110 V DC DC-14: 0,2 A bij 48 V DC DC-14: 1 A bij 24 V DC
Minimale belasting	100 mA bij 24 V DC

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4,000 cm
Package 1 Width	6,300 cm
Package 1 Length	8,100 cm
Package 1 Weight	50,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	108
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	5,800 kg

Duurzaamheid van het aanbod

REACH-regelgeving	 REACH-verklaring
REACH vrij van SVHC	Ja
EU-richtlijn RoHS	Voldoet  EU-verklaring RoHS
Vrij van giftige zware metalen	Ja
Kwikvrij	Ja
RoHS-regulering China	 RoHS-verklaring China
Informatie over RoHS-vrijstelling	 Ja
PVC-vrij	Ja

contractuele waarborg

Garantie	18 months
----------	-----------