

IE-FCM-SP0-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**SPElink®**

Service interface FrontCom® Micro with SPE coupling
acc. to IEC 63 171-2 in IP65

Single pair Ethernet is a technology that only requires one pair of wires to transmit data and power.

The resulting benefits will make SPE the preferred network at the field level and beyond.

Advantages of Single Pair Ethernet

- Consistent: Single Pair Ethernet enables uniform Ethernet-based communication from the sensor to the cloud
- Future-proof: key technology for Industry 4.0 and IIoT
- Flexible: ranges of up to 1000 m and transmission properties of up to 1 Gbps enable use across applications
- Innovative: lighter, less space required, and reduced installation effort

General ordering data

Version	FrontCom Micro SPE coupling, 2-core
Order No.	2870820000
Type	IE-FCM-SP0-C
GTIN (EAN)	4064675635291
Qty.	10 pc(s).

IE-FCM-SP0-C

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Wall thickness, min.	1 mm	Wall thickness, max.	5 mm
Net weight	17.023 g		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Tightening torque fixing nut	2 Nm	Connection 1	SPE socket acc. to IEC 63171-2
Connection 2	SPE socket acc. to IEC 63171-2	Description of article	FrontCom Micro SPE coupling
Wiring	2-core	Colour	black
Housing main material	PA UL 94 V0	Category	T1-B
Contact surface	Gold over nickel	Type of mounting	Cabinet, Distribution box
Shielding	360° shield contact	Protection degree	IP65, in closed state
Plugging cycles	750		

Electrical properties

Dielectric strength, contact / contact	≥ 1000 V DC	Dielectric strength, contact / shield	2250 V DC
PoE / PoE+	PoDL acc. to IEEE 802.3bu / cg	Rated current	3.5 A at 0°C

General standards

Connector standard	IEC 63171-2
--------------------	-------------

Classifications

ETIM 6.0	EC001031	ETIM 7.0	EC001031
ETIM 8.0	EC001031	ETIM 9.0	EC001031
ETIM 10.0	EC001031	ECLASS 9.0	27-18-27-02
ECLASS 9.1	27-18-27-90	ECLASS 10.0	27-18-27-02
ECLASS 11.0	27-18-27-02	ECLASS 12.0	27-18-28-92
ECLASS 13.0	27-18-28-92	ECLASS 14.0	27-18-28-92
ECLASS 15.0	27-18-28-92		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

Product Change Notification	Technical change of the housing of the FrontCom® Micro Technische Änderung des Gehäuses der FrontCom® Micro
-----------------------------	--


IE-FCM-SP0-C

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com


Drawings

Dimensioned drawing




Derating curve

Level I gem. IEC 63171

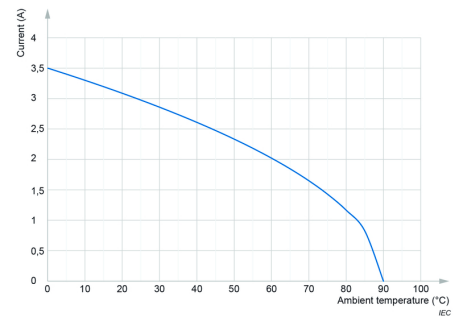

Installation cut-out

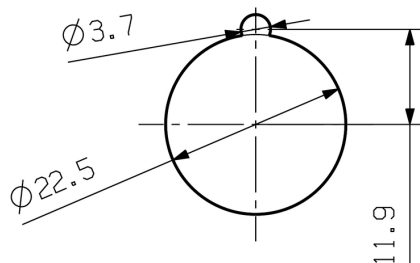

IE-FCM-SP0-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Complementary products**

SM is a MultiCard marker for labelling control and signalling devices. The tags are clipped into the carriers or attached by means of the adhesive film already fitted to them. Customised tags can be created with the PrintJet CONNECT or Plotter marking systems.

- Users can quickly produce tags to suit their needs
- No need to stock expensive standard tags
- Highly resistant printing quality when using the PrintJet as a substitute for engraving
- For extreme demands, we recommend the ETO SM protective film
- Holders can be used for the 22-mm or 30-mm-diameter push-buttons from Siemens, ABB, Moeller and Télémécanique

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	SM-H 27/18 SW	Version
Order No.	1716630000	SwitchMark, Accessories, 48 x 27 mm, black
GTIN (EAN)	4008190343194	
Qty.	25 pc(s).	