


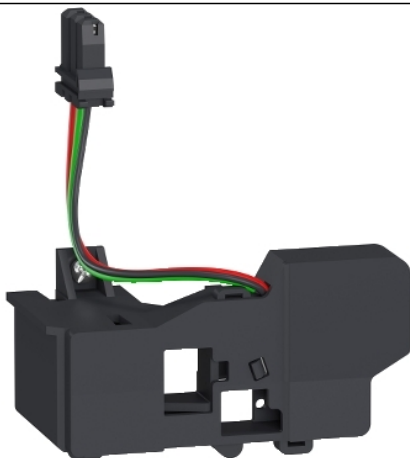

Hoofd

Range	Masterpact
Device short name	SDE
Device application	Controle
Bereik compatibiliteit	Masterpact Masterpact MTZ2 automaat Masterpact Masterpact MTZ3 automaat

Complementair

Type hulpcontacten	Standaard
Samenstelling signaleringscontacten	1 NO/NC
Mounting mode	Uittrekken
lth conventionele thermische stroom in vrije lucht	5 A
Uitschakelvermogen	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 3 A DC-12 24/48 V DC 0,3 A DC-12 125 V DC 0,15 A DC-12 250 V DC
Minimale belasting	100 mA bij 24 V

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,5 cm
Package 1 Width	4,0 cm
Package 1 Length	7,3 cm
Package 1 Weight	70,0 g

Duurzaamheid van het aanbod

REACH-regelgeving	 REACH-verklaring
REACH vrij van SVHC	Ja
EU-richtlijn RoHS	Voldoet aan vrijstellingen
Kwkvrij	Ja
RoHS-regulering China	 RoHS-verklaring China
Informatie over RoHS-vrijstelling	 Ja