
Prism terminal

KP NH 00

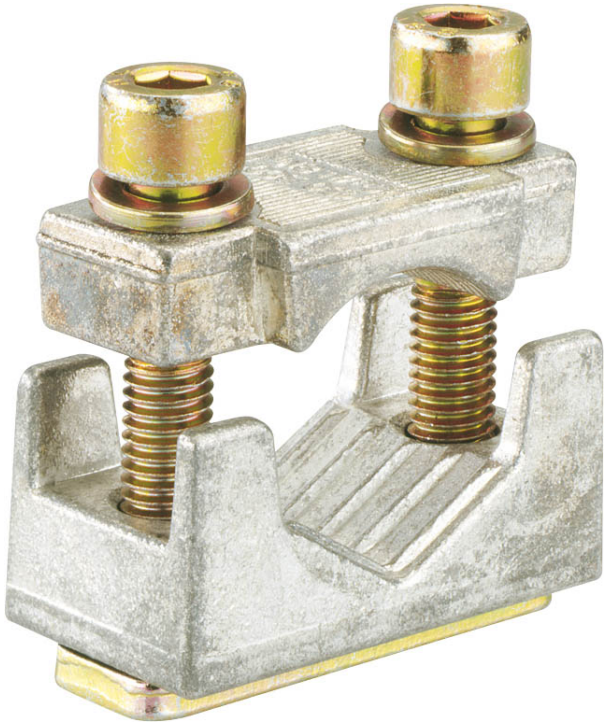

KP NH 00

Prism terminal

Productnumber: 07670001
Dimensions: 27 x 20,2 x 21 mm

Prism terminal for connecting aluminium and copper conductors to PE and N terminals (GPE, GN) and to NH switchgear in AKi fuse and switch housings (AKi-SS, AKi-ST)

for AL/CU conductors 1x (16-70)rm/rf/sm, aluminium conductor see technical appendix, Set = 3 pcs.

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	16 mm²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	70 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	16 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	70 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	16 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	70 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	16 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	70 mm²

Dimensions

Width:	27 mm
Length:	20.2 mm
Height:	21 mm
Weight:	0.089 kg

mechanical properties

Connection 1: Tightening moment:	3.6 Nm

Sales Information

EAN:	4013902859016
ETIM Class:	EC002498
Custom tariff number:	85369010
Minimum order quantity:	1