Junction box

WKE 6 - Duo 5 x 16²



WKE 6 - Duo 5 x 16²

Junction box

Productnumber: 86761001
Dimensions: 200 x 250 x 120 mm

Junction box, protection class IP66, Ui=450 V AC, certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), UL-EU (EN 62208), Insulation integrity PH120 tested in accordance with EN 50200, knockouts, M20/M25/M32/M40, (4 rear, 12 side), external fixing lugs, with E30 - E 90 electrical functional integrity according to DIN 4102 Part 12. Halogen-free enclosure made of special thermoplastic, terminals made of high-temperature-resistant special ceramic, universally positionable terminal holder

orange, Connection box, 5-pole, 1.5 - 16 mm², junction box 5-pole 1.5 - 16 mm², number of clampable wires per pole:
20 x 1.5² / 16 x 2.5² / 12 x 4² / 8 x 6² / 4 x 10² / 4 x 16²

Accessories supplied:
Cover retainer, screw anchors, 6 double membrane seals IP66 M32 sealing range 13 - 21 mm, 2 double membrane seals IP66 M40 sealing range 17 - 28 mm

IP66 | E30-E90 | 16² | 16² | IK08 | 450V AC | 450V DC | PH 120

Connect + Secure:
The WKE 2 – 6 cable branch and connection boxes are certified according to EN 60670-22 and EN 62208 and possess an Allgemeines bauaufsichtliches Prüfzeugnis (AbP) according to DIN 4102-12. They guarantee electrical function preservation in case of fire in E30 and E90 and include a total of 3 enclosure sizes with a rated cross-section of 1.5mm² to 16 mm². The flexibly mountable terminal holder can be rotated in 45° steps around its axis and can be infinitely adjusted along its length. This ensures a comfortable and secure installation with quick and clear wiring.

Technical Data

electrical characteristics

Rated insulation voltage AC:	450 V
Rated insulation voltage DC:	450 V
Min. conductor cross section:	1,5 mm²
max. wire cross section (wire branching):	16 mm²
Min. conductor cross section:	1,5 mm²
Max. conductor cross section:	16 mm²
Protection class:	II
Type of protection:	IP66
secured junction:	no
Circuit integrity class:	E30/E60/E90
Number of poles (T-piece):	5
Number of poles (feed-through):	5
UL Type Rating:	other
Number of fuses in T-piece:	other

Colours

Base unit colour:	orange
Cover colour:	orange

Additional features

Range of application:	Connectors and T-pieces

Dimensions

Width:	200 mm
Length:	250 mm
Height:	120 mm
Inner length:	235 mm
Inner width:	185 mm
Inner height:	102 mm
Weight:	1.415 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V0
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK08
Sealable:	yes
Fastening:	external fixing lugs

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902631292
ETIM Class:	EC002600
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Stainless steel 1.4567 (V2A)

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
Test mark:	UL-EU (EN 62208)

Accessories

26062001 - DMS M20/or - Double-membrane seals

26062501 - DMS M25/or - Double-membrane seals

26063201 - DMS M32/or - Double-membrane seals

26064001 - DMS M40/or - Double-membrane seals

22762001 - KVR M20-MGM/or - Cable gland

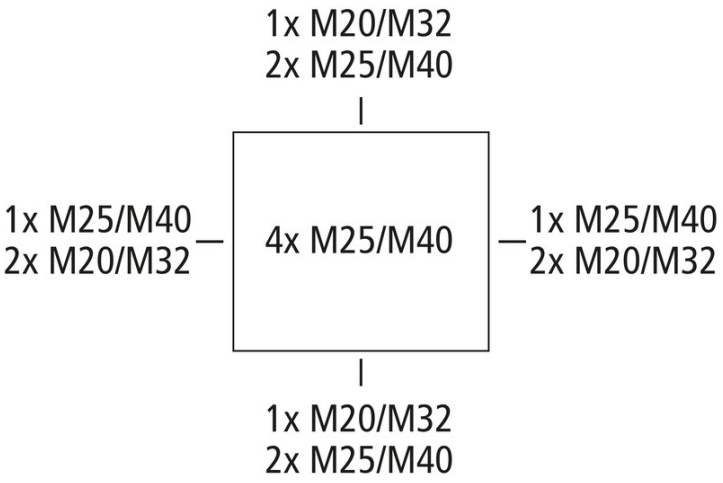
22762501 - KVR M25-MGM/or - Cable gland

22763201 - KVR M32-MGM/or - Cable gland

22764001 - KVR M40-MGM/or - Cable gland

86310001 - WKE BK 1 - Mounting plate

Cable gland


1x M20/M32
2x M25/M40
1x M25/M40
2x M20/M32
4x M25/M40
1x M25/M40
2x M20/M32
1x M20/M32
2x M25/M40