
Combined fuse enclosure

GST 401 KN-630

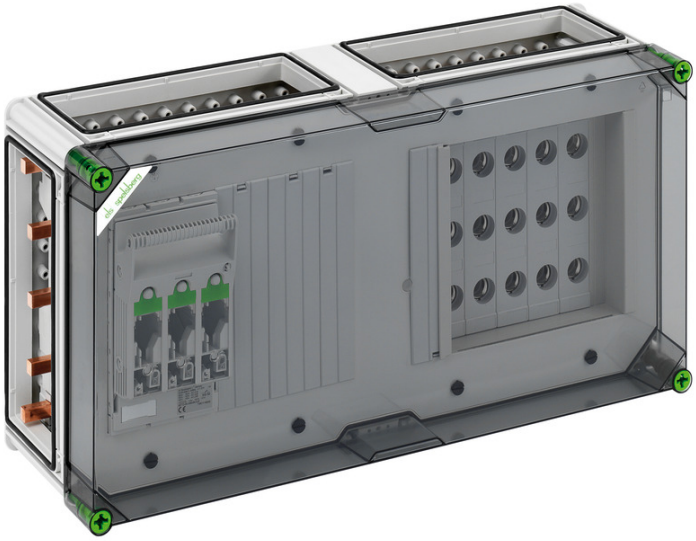

GST 401 KN-630

Combined fuse enclosure

CUSTOMIZABLE

Productnumber: 04640186
Dimensions: 640 x 320 x 179 mm

busbar enclosure, equipped with 1 x NH 00 fuse switch disconnector enclosure, Shell connection 1.5 - 50 mm², Universal output, 5 x 3-pole D02 bus-mounting fuse base, E 18 thread, Screw connection 1.5 - 25 mm², 5-pole busbar, with 5 busbar terminals for direct connection of a cable to the busbar system, additional N and PE terminal for each switch and fuse base, 4 x enclosure connectors (GGV)

busbar system 630 A, with transparent cover

IP65 IK08 400V AC

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Protection class:	II
Type of protection:	IP65
Rated current:	630 A
UL Type Rating:	3R

Dimensions

Width:	640 mm
Length:	320 mm
Height:	179 mm
Weight:	12.761 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Impact strength:	IK08
Cover screw torque:	2.5 Nm
Stackable:	yes

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902938995
ETIM Class:	EC000249
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate, glass-fibre reinforced
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

07251401 - GFS 14-m - Flange set

07505601 - GSV 56 - Busbar connector

07901901 - SK 18 - Bar-mounting fuse

07673001 - KPK NH00 - Prism terminal