

Data sheet

LTM-E16

Page 1/5

P/N

110280

EAN 4250184121022


2026/09/23

Version: H


Illustrations



Dimensional drawing

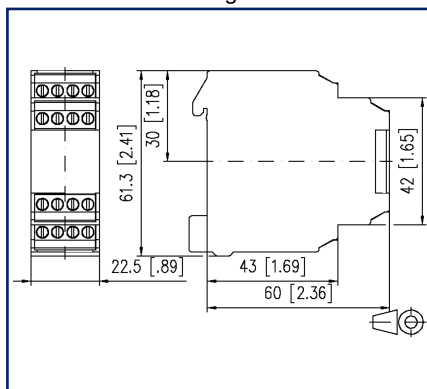

Wiring diagram

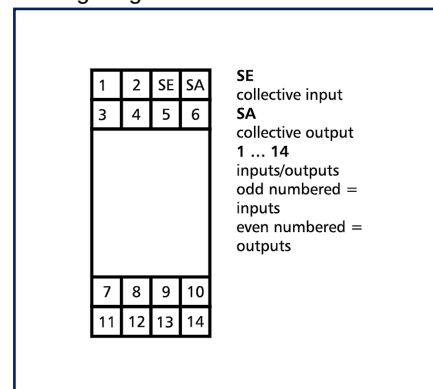

See enlarged drawings at the end of document

Product specification

The lamp test module combines several functions in one module (individual and collective messages and lamp test). The incoming fault messages are applied to the inputs (1, 3, 5, 7, 9, 11, 13). The signal lamps are connected to the outputs (2, 4, 6, 8, 10, 12, 14). When there is a message at an input, the belonging signal lamp lights up. At the same time, a signal is transmitted to the SA output. When a signal is applied to the SE input, all signal lamps light up without a signal being transmitted to the SA output. Please do not use it for 230 V LEDs! (capacitor power supply units)

- for 7 lamps
- Output for collective message
- Input for lamp test
- Connection with screw-type terminals

Data sheet

LTM-E16

Page 2/5

P/N
110280
EAN 4250184121022
2026/09/23
Version: H

Technical Data

Supply	
Operating voltage	250 V AC/DC
Housing	
Dimensions	
Dimension (W x H x D)	22.5 mm x 61.3 mm x 60 mm
Dimension (W x H x D)	0.886 in. x 2.413 in. x 2.362 in.
Weight	100 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Screw type terminal blocks
Terminal blocks	
Wire cross section solid	0.2 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm
Material	
Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polyamid 6.6 V0
Protection category according to IEC 60529	
Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20
Climatic Data	
Operating	
Temperature - Operating °C	-20 °C - 55 °C
Temperature - Operating °F	-4 °F - 131 °F
Relative humidity	max. 85 % non-condensing
Storage	
Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F

Data sheet
LTM-E16

Page 3/5

P/N
110280

EAN 4250184121022

2026/09/23

Version: H

Technical Data

Classifications

ETIM 7.0	EC000683
ETIM 8.0	EC000683
ETIM 9.0	EC000683
ETIM 10.0	EC000683

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

LTM-E16

Page 4/5

P/N

110280


EAN 4250184121022

2026/09/23

Version: H

Illustrations

Dimensional drawing

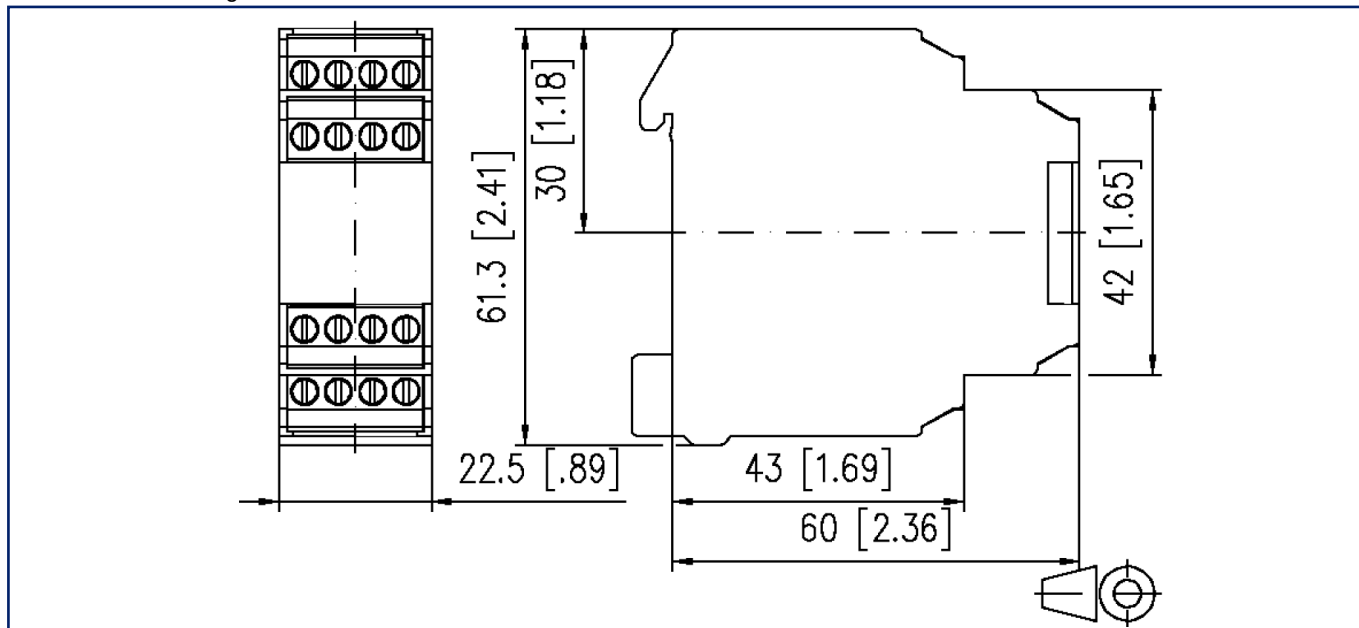

Wiring diagram

1	2	SE	SA
3	4	5	6
7	8	9	10
11	12	13	14

SE
collective input
SA
collective output
1 ... 14
inputs/outputs
odd numbered =
inputs
even numbered =
outputs



Data sheet
LTM-E16

Page 5/5

P/N
110280
EAN 4250184121022
2026/09/23
Version: H

Illustrations

Circuit diagram

