


Rittal – The System.

Faster – better – everywhere.



RX 9360.503

RiLineX CB component adaptor

State: 19/10/2026 (Source: www.rittal.com/com-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.503 - RiLineX CB component adaptor

RiLineX CB component adaptor (3-pole, max. 160 A) for 60 mm busbar systems. The device width is 81 mm. The "Easy-Fix" concept allows adaptors and switches to be mounted independently of one another. This concept is available for all popular manufacturers. The adaptor features tool-free snap-on mounting with semi-automatic adjustment of the bar thickness between 5 and 10 mm. Version for cable outlet at the top.

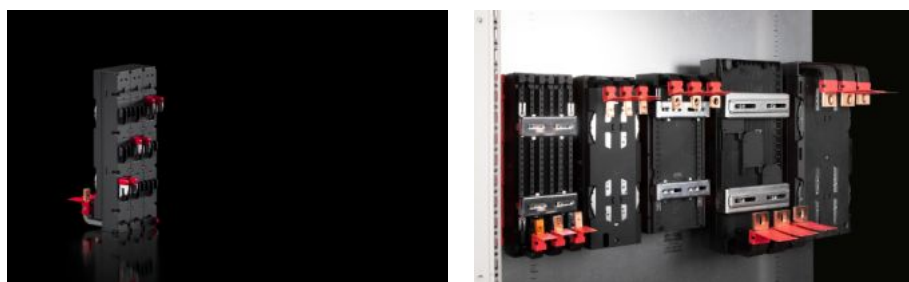

Features

Model No.	RX 9360.503
Design	Easy Fix CAUTION: Only suitable for moulded-case circuit-breakers (MCCBs) with box terminal
Benefits	Direct mounting of moulded-case circuit-breakers (MCCBs) on the board Snap-on mounting up to 250 A and simple adjustment to busbar thickness 5/10 mm Fast, simple pre-assembly of standard market switch types outside of the enclosure
Material	Polyamide (PA 6) Fire protection corresponding to UL 94
Colour	RAL 9005 RAL 35745
IP protection category to IEC 60 529	IP 2XB
Electrical ratings UL (SCCR)	65 kA - 480 V, circuit breaker max. 125 A, DIVQ/7
Rated impulse withstand voltage Uimp	8 kV

Features

Rated voltage	690 V AC 600 V AC (UL)
Rated insulation voltage Ui	1,000 V
Contamination level	3
Clamping area for laminated copper bars (W x H)	9 x 6 mm
Number of poles	3-pole
Cable outlet	Top
Type of electrical connection	Box terminal
To fit busbar system	RiLineX RiLine60
Heat loss max.	8 W
Fundamental frequency	50...60 Hz
Ambient humidity (non-condensing)	10...90 %
To fit busbars	15 x 5/10 20 x 5/10 30 x 5/10
Operating temperature range	-25 °C...55 °C
Storage temperature range	-25 °C...75 °C
Dimensions	Width: 82 mm Height: 252 mm Depth: 63 mm
Packs of	1 pc(s).
Net weight	1.36 kg
Gross weight	1.369 kg
Copper weight (kg per piece)	0.375
PCF per pack (cradle-to-gate)	13.28
Customs tariff number	39269097

Features

Product description	RiLineX CB component adaptor (3-pole, max. 160 A) for 60 mm busbar systems. The device width is 81 mm. The "Easy-Fix" concept allows adaptors and switches to be mounted independently of one another. This concept is available for all popular manufacturers. The adaptor features tool-free snap-on mounting. Version for cable outlet at the top.
---------------------	---

Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration