

Data sheet

OpDAT adapter E2000-Simplex OS2

Page 1/5

P/N

15090058-I

EAN 4250184149408


2026/08/24

Version: W

Illustrations



Dimensional drawing

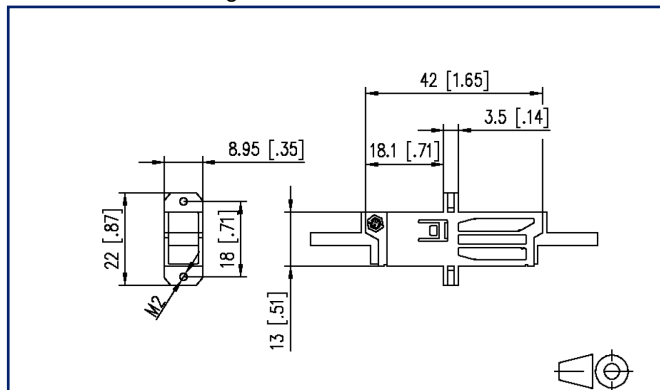

See enlarged drawings at the end of document

Product specification

- housing of the E2000 adapter made of plastic, screws included in the delivery
- slotted sleeve made of ceramics
- high material stability and surface quality and long service life
- service life: min. 1000 plug cycles
- variants: blue (SM), green (SM APC), beige-green (OM5), beige-violet (OM4) or beige-aqua (OM3)



Data sheet

OpDAT adapter E2000-Simplex OS2

Page 2/5

P/N
15090058-I
EAN 4250184149408
2026/08/24
Version: W

Technical Data

General Data

Fields of application	structured building cabling fiber to the desk data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	coupler / adapter (FO)
Transmission technology	Fiber optic
Color	blue
Dimensions	
Dimension (L x W x H)	42 mm x 8.95 mm x 22 mm
Dimension (L x W x H)	1.654 in. x 0.352 in. x 0.866 in.
Mode type of the fiber	Singlemode
Labeling option	on housing

Connections/interfaces

Connector interfaces	E2000
----------------------	-------

Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	simplex
Mounting method	screwable
Life - Number of mating cycles	min. 1000
Position/mounting of latch standard installation position	top

Materials and material properties

Material - Housing	Plastics
Material - Sleeve	ceramic, slotted
Halogen free	yes
RoHS	compliant



Data sheet

Page 3/5

OpDAT adapter E2000-Simplex OS2

P/N

15090058-I

EAN 4250184149408

2026/08/24

Version: W

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -40 °C - 85 °C

Temperature - Storage °F -40 °F - 185 °F

Temperature - Operating °C -40 °C - 85 °C

Temperature - Operating °F -40 °F - 185 °F

Standards/Regulations

Fibre optic connector interfaces LSH - IEC 61754-15

Classifications

ETIM 7.0 EC000752

ETIM 8.0 EC000752

ETIM 9.0 EC000752

ETIM 10.0 EC000752

Packing details

Type of packaging 1 pc(s) / plastic bag

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 4/5

OpDAT adapter E2000-Simplex OS2

P/N

15090058-I

EAN 4250184149408

2026/08/24

Version: W

Accessories from

P/N	Designation
14040000-E	MCO IP69k protective housing for outdoor use, set for exposed installation
14040010-E	MCO IP69k Protective housing for outdoor use, set with mounting bracket
14040100-E	MCO IP69k Protective housing for outdoor use, set wall/ housing bushing
1502007300-E	OpDAT PF patch panel for 24xLC-D/SC-S/E2000-S
1502200200-E	OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray
15024A0200-E	OpDAT REGpro front cover for 12xE2000/12xSC-S
15024A7700-E	OpDAT REGpro front cover for 6xLC-D/SC-S/E2000
1502507300-E	OpDAT fix patch panel for 24xLC-D/SC-S/E2000
1502607300-E	OpDAT slide patch panel for 24xLC-D/SC-S/E2000



Data sheet

Page 5/5

OpDAT adapter E2000-Simplex OS2

P/N
15090058-I

EAN 4250184149408

2026/08/24

Version: W

Illustrations

Dimensional drawing

