

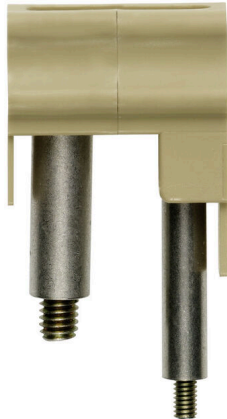
WQV 35-2.5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

| | |
|------------|---|
| Version | Cross-connector (terminal), when screwed in, yellow, 41 A, Number of poles: 3, Pitch in mm (P): 16.00, Insulated: Yes, Width: 13 mm |
| Order No. | 1064100000 |
| Type | WQV 35-2.5 |
| GTIN (EAN) | 4008190142285 |
| Qty. | 10 items |

WQV 35-2.5

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Dimensions and weights

| | | | |
|------------|---------|-----------------|-------------|
| Depth | 41.5 mm | Depth (inches) | 1.6339 inch |
| Height | 21 mm | Height (inches) | 0.8268 inch |
| Width | 13 mm | Width (inches) | 0.5118 inch |
| Net weight | 10.72 g | | |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|----------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -60 °C...85 °C |
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|---------------------------|-------|--------|--------|
| Basic material | PA 66 | Colour | yellow |
| UL 94 flammability rating | V-0 | | |

System specifications

| | |
|---------|-------------------|
| Version | For the terminals |
|---------|-------------------|

Additional technical data

| | | | |
|--------------------------|-----------------|---------------------|-----------------|
| Type of fixing | when screwed in | Installation advice | Direct mounting |
| Explosion-tested version | No | | |

Conductors for clamping (rated connection)

| | | | |
|-------------------------|--------|-------------------------|--------|
| Tightening torque, max. | 0.8 Nm | Tightening torque, min. | 0.4 Nm |
|-------------------------|--------|-------------------------|--------|

Dimensions

| | |
|-----------------|----------|
| Pitch in mm (P) | 16.00 mm |
|-----------------|----------|

General

| | | | |
|-----------------|---|---------------------|-----------------|
| Number of poles | 3 | Installation advice | Direct mounting |
|-----------------|---|---------------------|-----------------|

Rating data

| | | | |
|---------------|-------|-----------------|------|
| Rated voltage | 400 V | Nominal current | 41 A |
|---------------|-------|-----------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000489 | ETIM 9.0 | EC000489 |
| ETIM 10.0 | EC000489 | ECLASS 14.0 | 27-25-03-03 |
| ECLASS 15.0 | 27-25-03-03 | | |