
Plug clamps

KLS L 1/14-SL

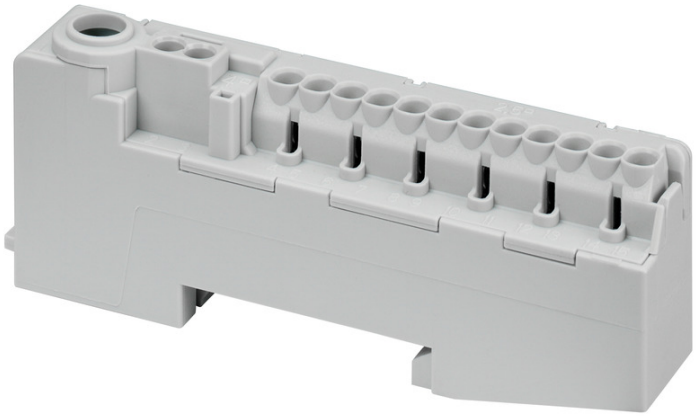

KLS L 1/14-SL

Plug clamps

Productnumber: 79032001
Dimensions: 94 x 35 x 17 mm

Terminal, for rigid conductors, 15 clamping points, 1 screwable clamping point 25 mm² (1.5-25 mm² re, 1-16 mm² rf+AD), 2 screwless clamping points 4 mm² (1-4 mm² re, 1-2.5 mm² rf+AD), 12 screwless clamping points 2.5 mm² (1-2.5 mm² re, 0.75-1.5 mm² rf+AD), for assembly on 35 mm DIN mounting rail, for current carrying capacity of 76 A

Grey

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Number of poles:	1
shockproof:	Yes
Connection 1: Connection type:	Screws
Connection 1: Strip length:	10 mm
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	1.5 mm²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	16 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	1.5 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	16 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	1.5 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	25 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	1.5 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	25 mm²
Connection 2: Connection type:	Screwless
Connection 2: Clamping points per pole:	15
Connection 2: Suitable for Al conductors:	15
Connection 2: Connectable conductor cross-section, fine-wire without ferrule (min):	0.75 mm²
Connection 2: Connectable conductor cross-section, fine-wire without ferrule (max):	2.5 mm²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (min):	0.75 mm²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (max):	2.5 mm²

electrical characteristics

Connection 2: Connectable conductor cross-section, single-wire (min):	1 mm²
Connection 2: Connectable conductor cross-section, single-wire (max):	4 mm²

Dimensions

Width:	94 mm
Length:	35 mm
Height:	17 mm
Weight:	0.0396 kg

Material characteristics

Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Connection 1: Tightening moment:	3 Nm

Sales Information

EAN:	4013902612093
ETIM Class:	EC001284
Custom tariff number:	85369010
Minimum order quantity:	1