
Prism terminal

# KP NH 1

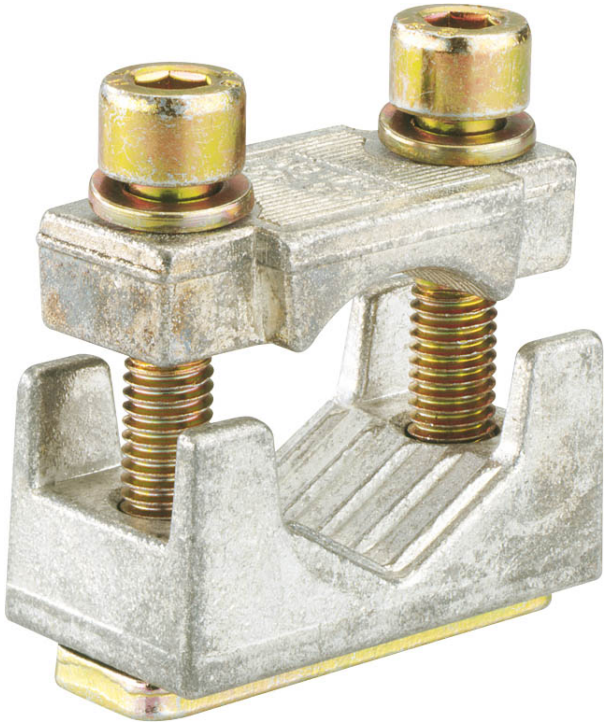

## KP NH 1

**Prism terminal**

Productnumber: 07670101
Dimensions: 27 x 20,2 x 21 mm

Prism terminal for connecting aluminium and copper conductors to PE and N terminals (GPE, GN) and to NH switchgear in AKi fuse and switch housings (AKi-SS, AKi-ST)

**for AL/CU conductors 1x (70-150)rm/rf/sm, aluminium conductor see technical appendix, Set = 1 pcs.**

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

# Technical Data

## electrical characteristics

| | |
|---|---|
| Number of poles: | 1 |
| shockproof: | No |
| Connection 1: Connection type: | Screws |
| Connection 1: Clamping points per pole: | 1 |
| Connection 1: Suitable for Cu conductors: | 1 |
| Connection 1: Suitable for Al conductors: | 1 |
| Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min): | 35 mm² |
| Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max): | 150 mm² |
| Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min): | 35 mm² |
| Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max): | 150 mm² |
| Connection 1: Connectable conductor cross-section, single-wire (min): | 35 mm² |
| Connection 1: Connectable conductor cross-section, single-wire (max): | 150 mm² |
| Connection 1: Connectable conductor cross-section, stranded (min): | 35 mm² |
| Connection 1:Connectable conductor cross-section, stranded (max): | 150 mm² |

## Dimensions

| | |
|---|---|
| Width: | 27 mm |
| Length: | 20.2 mm |
| Height: | 21 mm |
| Weight: | 0.116 kg |

## Sales Information

| | |
|---|---|
| EAN: | 4013902859023 |
| ETIM Class: | EC002498 |
| Custom tariff number: | 85369010 |

## Sales Information

| | |
|---|---|
| Minimum order quantity: | 1 |