

**RCM270524****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Similar to illustration

Individual relays within the RIDERSERIES RCM

- 2 CO contacts
- Optional AC or DC coils
- With test button

**General ordering data**

|            |                                                                                                                                                                          |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | RIDERSERIES RCM, Relay, Number of contacts: 2, CO contact AgNi, Rated control voltage: 24 V AC, Continuous current: 12 A, Plug-in connection, Test button available: Yes |
| Order No.  | <a href="#">8689760000</a>                                                                                                                                               |
| Type       | RCM270524                                                                                                                                                                |
| GTIN (EAN) | 4032248360437                                                                                                                                                            |
| Qty.       | 10 pc(s).                                                                                                                                                                |

RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 29 mm   | Depth (inches)  | 1.142 inch |
| Height     | 28 mm   | Height (inches) | 1.102 inch |
| Width      | 22.5 mm | Width (inches)  | 0.886 inch |
| Net weight | 29 g    |                 |            |

### Temperatures

|                     |                                                |                       |                |
|---------------------|------------------------------------------------|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C                                 | Operating temperature | -40 °C...70 °C |
| Humidity            | 40 °C / 93 % rel. humidity,<br>no condensation |                       |                |

### Rated data UL

|                         |         |
|-------------------------|---------|
| Certificate No. (cURus) | E522350 |
|-------------------------|---------|

### Control side

|                       |          |                  |              |
|-----------------------|----------|------------------|--------------|
| Rated control voltage | 24 V AC  | Rated current AC | 41.7 mA      |
| Power rating          | 1000 mVA | Coil resistance  | 192 Ω ± 10 % |
| Status indicator      | No       |                  |              |

### Load side

|                                         |                                                                                                    |                                         |                                            |
|-----------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------------------------------|
| Rated switching voltage                 | 240 V AC                                                                                           | Continuous current                      | 12 A                                       |
| Max. switching frequency at rated load  | 0.1 Hz                                                                                             | Max. switching voltage, AC              | 250 V                                      |
| Inrush current                          | 24 A / 20 ms                                                                                       | AC switching capacity (resistive), max. | 3000 VA                                    |
| DC switching capacity (resistive), max. | 288 W @ 24 V                                                                                       | Switch-on delay                         | ≤ 15 ms                                    |
| Switch-off delay                        | ≤ 10 ms                                                                                            | Contact type                            | 2 CO contact (AgNi)                        |
| Mechanical service life                 | AC coil 20 x 10 <sup>6</sup> switching<br>cycles, DC coil 30 x 10 <sup>6</sup><br>switching cycles | Min. switching power                    | 1 mA @ 24 V, 10 mA @ 12<br>V, 100 mA @ 5 V |

### General data

|                                      |     |                        |                                                  |
|--------------------------------------|-----|------------------------|--------------------------------------------------|
| Test button available                | Yes | Version of test button | Lockable test button, Mo-<br>mentary test button |
| Mechanical switch position indicator | Yes | Colour                 | Transparent                                      |
| UL 94 flammability rating            | V-2 |                        |                                                  |

### Insulation coordination

|                                                                  |                                |                                                     |                                |
|------------------------------------------------------------------|--------------------------------|-----------------------------------------------------|--------------------------------|
| Rated voltage                                                    | 250 V                          | Pollution severity                                  | 2                              |
| Surge voltage category                                           | III                            | Insulating material group                           | IIIa                           |
| Clearance and creepage distances for<br>control side - load side | ≥ 4 mm                         | Dielectric strength for control side - load<br>side | 2.5 kV <sub>eff</sub> / 1 Min. |
| Dielectric strength of neighbouring con-<br>tacts                | 2.5 kV <sub>eff</sub> / 1 Min. | Dielectric strength of open contact                 | 1.2 kV <sub>eff</sub> / 1 min. |
| Impulse withstand voltage                                        | 5 kV (1.2/50 μs)               | Protection degree                                   | IP20                           |

### Further details of approvals / standards

|                         |                |                       |          |
|-------------------------|----------------|-----------------------|----------|
| Certificate No. (CSA)   | 249409-2426937 | Certificate No. (VDE) | 40011762 |
| Certificate No. (cURus) | E522350        |                       |          |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Connection data

|                        |                    |
|------------------------|--------------------|
| Wire connection method | Plug-in connection |
|------------------------|--------------------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ETIM 8.0    | EC001437    | ETIM 9.0    | EC001437    |
| ETIM 10.0   | EC001437    | ECLASS 9.0  | 27-37-16-01 |
| ECLASS 9.1  | 27-37-16-01 | ECLASS 10.0 | 27-37-16-01 |
| ECLASS 11.0 | 27-37-16-01 | ECLASS 12.0 | 27-37-16-01 |
| ECLASS 13.0 | 27-37-16-01 | ECLASS 14.0 | 27-37-16-01 |
| ECLASS 15.0 | 27-37-16-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

Approvals



|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319263/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319263/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/</a> |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E522350    |

## Downloads

|                                             |                                                                         |
|---------------------------------------------|-------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                         |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                |
| Brochures                                   |                                                                         |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany


www.weidmueller.com

## Drawings

## Wiring diagram

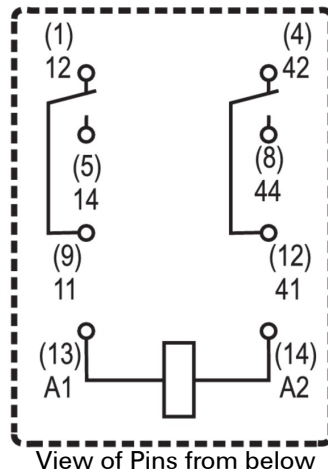


## Graph

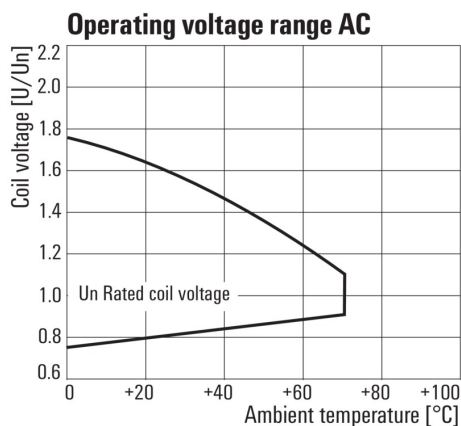


AC operational voltage range


## Graph

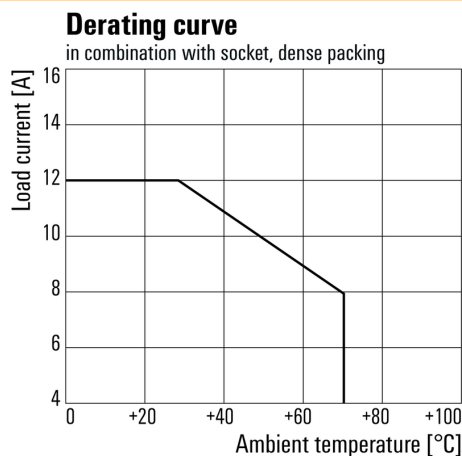Derating curve  
Relay in combination with base


## Graph

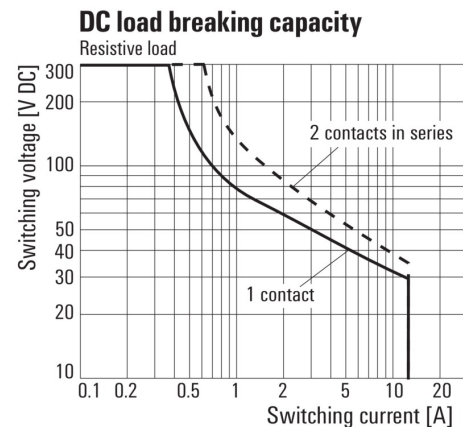DC load limit curve  
Resistive load

## Graph

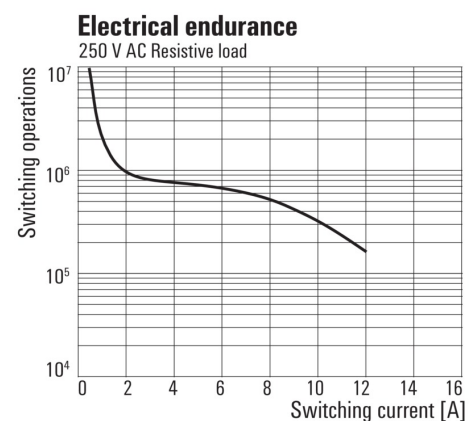Electrical service life  
250 V AC resistive load

## Dimensional drawing

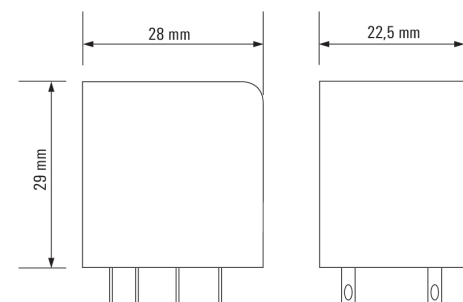

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Protective varistor



Pluggable protective modules for the RIDERSERIES RCI / RCM relay sockets, with optional protective functions.

- With protective varistor
- For UC supply voltage

## General ordering data

|            |                            |                                                                         |
|------------|----------------------------|-------------------------------------------------------------------------|
| Type       | RIM-I 4 24VUC VAR          | Version                                                                 |
| Order No.  | <a href="#">8869710000</a> | RIDERSERIES, Protective varistor, Rated control voltage: 24 V UC, Plug- |
| GTIN (EAN) | 4032248606344              | in connection                                                           |
| Qty.       | 10 pc(s).                  |                                                                         |

## ESG 6/15



## Guaranteed long service life: ESG

The multi-colour and multi-format labels have a strong adhesive layer to ensure the best possible adhesion to the underlying surface. Double laminated polyester makes the basic material very thin and yet extremely tear-resistant.

## Your benefits with MultiMark

- "Different materials for various requirements"
- Can be used with equipment from many manufacturers
- Device markers with a familiar design

## General ordering data

|            |                            |                                       |
|------------|----------------------------|---------------------------------------|
| Type       | ESG 6/15 MM WS             | Version                               |
| Order No.  | <a href="#">2619940000</a> | ESG, Device markers, 6 x 15 mm, white |
| GTIN (EAN) | 4050118626148              |                                       |
| Qty.       | 3,000 pc(s).               |                                       |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                   |
|------------|----------------------------|---------------------------------------------------|
| Type       | ESG 9/26 SCM-I MC NE WS    | Version                                           |
| Order No.  | <a href="#">2558330000</a> | ESG, Device markers x 26 mm, PA 66, Colour: white |
| GTIN (EAN) | 4050118569049              |                                                   |
| Qty.       | 80 pc(s).                  |                                                   |

## Cross-connection for socket with screw connection

Cross-connection for the sockets in the D-SERIES DRM.



## General ordering data

|            |                            |                                  |
|------------|----------------------------|----------------------------------|
| Type       | SCM-I QV S                 | Version                          |
| Order No.  | <a href="#">1132080000</a> | RIDERSERIES RCM, Cross-connector |
| GTIN (EAN) | 4032248912193              |                                  |
| Qty.       | 10 pc(s).                  |                                  |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Sockets



relays sockets for RIDERSERIES RCM relays

- 2, 3 and 4 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

## General ordering data

|            |                            |                                                                   |
|------------|----------------------------|-------------------------------------------------------------------|
| Type       | SCMH 2CO                   | Version                                                           |
| Order No.  | <a href="#">8869400000</a> | RIDERSERIES RCM, Relay socket, Number of contacts: 2, CO contact, |
| GTIN (EAN) | 4032248614264              | Continuous current: 12 A, Screw connection                        |
| Qty.       | 10 pc(s).                  |                                                                   |
| Type       | SCMH 4CO                   | Version                                                           |
| Order No.  | <a href="#">8869420000</a> | RIDERSERIES RCM, Relay socket, Number of contacts: 4, CO contact, |
| GTIN (EAN) | 4032248614271              | Continuous current: 6 A, Screw connection                         |
| Qty.       | 10 pc(s).                  |                                                                   |
| Type       | SCMH 4CO N                 | Version                                                           |
| Order No.  | <a href="#">8869390000</a> | RIDERSERIES RCM, Relay socket, Number of contacts: 4, CO contact, |
| GTIN (EAN) | 4032248614257              | Continuous current: 6 A, Screw connection                         |
| Qty.       | 10 pc(s).                  |                                                                   |
| Type       | SCMH 4CO P                 | Version                                                           |
| Order No.  | <a href="#">8869430000</a> | RIDERSERIES RCM, Relay socket, Number of contacts: 4, CO contact, |
| GTIN (EAN) | 4032248614288              | Continuous current: 6 A, PUSH IN                                  |
| Qty.       | 10 pc(s).                  |                                                                   |
| Type       | SCMH 2CO P                 | Version                                                           |
| Order No.  | <a href="#">8876220000</a> | RIDERSERIES RCM, Relay socket, Number of contacts: 2, CO contact, |
| GTIN (EAN) | 4032248609031              | Continuous current: 12 A, PUSH IN                                 |
| Qty.       | 10 pc(s).                  |                                                                   |

## ESG 6/17



## Guaranteed long service life: ESG

The multi-colour and multi-format labels have a strong adhesive layer to ensure the best possible adhesion to the underlying surface. Double laminated polyester makes the basic material very thin and yet extremely tear-resistant.

## Your benefits with MultiMark

- "Different materials for various requirements"
- Can be used with equipment from many manufacturers
- Device markers with a familiar design

## General ordering data

|            |                            |                                       |
|------------|----------------------------|---------------------------------------|
| Type       | ESG 6/17 MM WS             | Version                               |
| Order No.  | <a href="#">2005100000</a> | ESG, Device markers, 6 x 17 mm, white |
| GTIN (EAN) | 4050118390728              |                                       |
| Qty.       | 3,000 pc(s).               |                                       |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Cross-connection for socket with PUSH IN connection




Cross-connection for the sockets in the RIDERSERIES RCM

## General ordering data

| Type       | SCM-I QV P                 | Version                          |
|------------|----------------------------|----------------------------------|
| Order No.  | <a href="#">8870850000</a> | RIDERSERIES RCM, Cross-connector |
| GTIN (EAN) | 4032248631698              |                                  |
| Qty.       | 10 pc(s).                  |                                  |

## LED



Pluggable protective modules for the RIDERSERIES RCI / RCM relay sockets, with optional protective functions.

- Optional with green or red LED
- For UC supply voltage

## General ordering data

| Type       | RIM-I 3 24/60VUC GN        | Version                                                                          |
|------------|----------------------------|----------------------------------------------------------------------------------|
| Order No.  | <a href="#">8869620000</a> | RIDERSERIES, LED module, Rated control voltage: 24...60 V UC, Plug-in connection |
| GTIN (EAN) | 4032248614561              |                                                                                  |
| Qty.       | 10 pc(s).                  |                                                                                  |
| Type       | RIM-I 3 24/60VUC           | Version                                                                          |
| Order No.  | <a href="#">8869610000</a> | RIDERSERIES, LED module, Rated control voltage: 24...60 V UC, Plug-in connection |
| GTIN (EAN) | 4032248614554              |                                                                                  |
| Qty.       | 10 pc(s).                  |                                                                                  |
| Type       | RIM-I 3 6/24VUC            | Version                                                                          |
| Order No.  | <a href="#">8869630000</a> | RIDERSERIES, LED module, Rated control voltage: 6...24 V UC, Plug-in connection  |
| GTIN (EAN) | 4032248614578              |                                                                                  |
| Qty.       | 10 pc(s).                  |                                                                                  |
| Type       | RIM-I 3 6/24VUC GN         | Version                                                                          |
| Order No.  | <a href="#">8869640000</a> | RIDERSERIES, LED module, Rated control voltage: 6...24 V UC, Plug-in connection  |
| GTIN (EAN) | 4032248614585              |                                                                                  |
| Qty.       | 10 pc(s).                  |                                                                                  |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Retaining clips



Retaining clip for RIDERSERIES RCM relays

- Metal and plastic retaining clip

## General ordering data

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | SCM-I CLIP N               | Version                         |
| Order No.  | <a href="#">8875620000</a> | RIDERSERIES RCM, Retaining clip |
| GTIN (EAN) | 4032248608577              |                                 |
| Qty.       | 10 pc(s).                  |                                 |
| Type       | SCM-I CLIP P               | Version                         |
| Order No.  | <a href="#">8869440000</a> | RIDERSERIES RCM, Retaining clip |
| GTIN (EAN) | 4032248614295              |                                 |
| Qty.       | 10 pc(s).                  |                                 |
| Type       | SCM-I CLIP M               | Version                         |
| Order No.  | <a href="#">8869450000</a> | RIDERSERIES RCM, Retaining clip |
| GTIN (EAN) | 4032248614301              |                                 |
| Qty.       | 10 pc(s).                  |                                 |

## Protection module



Pluggable protective modules for the RIDERSERIES RCI / RCM relay sockets, with optional protective functions.

- Optional with free-wheeling diode, protective varistor, load resistor or RC filter

## General ordering data

|            |                            |                                                                                |
|------------|----------------------------|--------------------------------------------------------------------------------|
| Type       | RIM-I 1 6/230V             | Version                                                                        |
| Order No.  | <a href="#">8869580000</a> | RIDERSERIES, Free-wheeling diode, Rated control voltage: 6...230 V             |
| GTIN (EAN) | 4032248614523              | DC, Plug-in connection                                                         |
| Qty.       | 10 pc(s).                  |                                                                                |
| Type       | RIM-I 3 6/60VAC RC         | Version                                                                        |
| Order No.  | <a href="#">8869770000</a> | RIDERSERIES, RC filter, Rated control voltage: 6...60 V UC, Plug-in connection |
| GTIN (EAN) | 4032248606320              |                                                                                |
| Qty.       | 10 pc(s).                  |                                                                                |

## RCM270524

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Drawings

## Miscellaneous

|                                    |                        | RCM |  |  |  |  |                          |                  |
|------------------------------------|------------------------|-----|--|--|--|--|--------------------------|------------------|
| Type                               | RIDER Control Multiple |     |  |  |  |  | Coil voltage             | with LED + diode |
| Type of contact                    |                        |     |  |  |  |  | 006 6 V DC               | L06              |
| 2 2CO                              |                        |     |  |  |  |  | 012 12 V DC              | L12 AB2          |
| 3 3CO                              |                        |     |  |  |  |  | 024 24 V DC              | L24 AC4          |
| 5 4CO                              |                        |     |  |  |  |  | 048 48 V DC              | L48 AE8          |
|                                    |                        |     |  |  |  |  | 060 60 V DC              | L60              |
|                                    |                        |     |  |  |  |  | 110 110 V DC             | M10 BB0          |
|                                    |                        |     |  |  |  |  | 220 220 V DC             | N20              |
| Contact material                   |                        |     |  |  |  |  | 506 6 V AC               | R06              |
| 7 AgNi 90/10 with test button      |                        |     |  |  |  |  | 512 12 V AC              | R12              |
| 8 AgNi 90/10 hgp, with test button |                        |     |  |  |  |  | 524 24 V AC              | R24              |
|                                    |                        |     |  |  |  |  | 548 48 V AC              | R48              |
|                                    |                        |     |  |  |  |  | 615 115 V AC             | S15              |
|                                    |                        |     |  |  |  |  | 730 230 V AC             | T30              |
|                                    |                        |     |  |  |  |  | Type of construction     |                  |
|                                    |                        |     |  |  |  |  | 0 Standard, 2,8mm Faston |                  |

Type codes