date: 23/10/2026

# DROP 28 LED

## Part number 303063

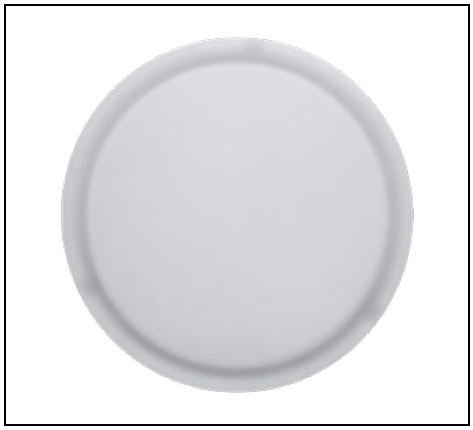

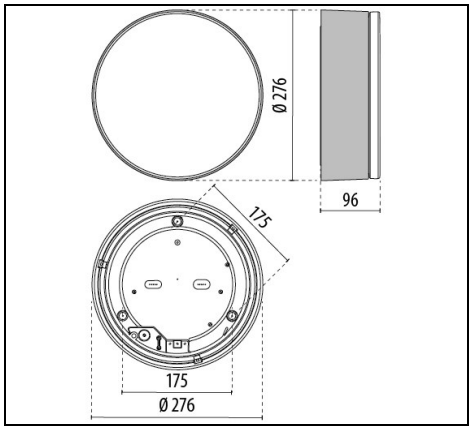

### Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:
- Housing manufactured from technopolymer
- Pressed glass diffuser, internally coated, and matt finished outside
- Technopolymer silicone sealing gasket
- Side entry for 20 mm conduits (drill out holes in housing arrangement)
- Chromed steel spring locks to secure the diffuser to housing
- Self-adhesive pictograms available as accessory (ordered separately)
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC002892 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | LED | **Light source:** | LED |
| **Lightsource lumen output [lm]:** | 2226 | **Luminaire lumen output [lm]:** | 1336 |
| **Luminaire wattage [W]:** | 16 W | **Luminous efficacy [lm/W]:** | 84 |
| **CRI:** | 80 | **Colour temperature [K]:** | 3000 |
| **Colour / Finishing:** | WH-87 / White / Textured | **IP degree of protection:** | IP55 |
| **Impact resistance / impact energy:** | IK06 1J xx3 | **Protection class:** | II |
| **Optic:** | S/EW - Symmetric Extra-Wide | **Net weight [kg]:** | 2.336 |
| **Overall diameter [mm]:** | 276 | **Overall width [mm]:** | 99 |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Round 150 ≤ x ≤ 300 mm | **Housing material:** | Plastic |
| **Diffuser material:** | Glass | **Glow wire test [°C]:** | 750 °C |

## Electrical features

| | | | |
|---|---|---|---|
| **Voltage type:** | AC | **Input voltage [V AC]:** | 220/240 |
| **Input frequency [Hz]:** | 50/60 | **Power factor / COS Φ:** | >0.9 |
| **Inrush current [A/µs]:** | 5 / 50 | **C10 1.5 mm²:** | 52 |
| **C16 2.5 mm²:** | 85 | **B10 1.5 mm²:** | 31 |
| **B16 2.5 mm²:** | 50 | | |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Outdoor lighting | **Mounting type:** | Bulkhead |
| **Min. ambient temperature [°C]:** | -20 | **Max. ambient temperature [°C]:** | 25 |

## Light features

| | | | |
|---|---|---|---|
| **MacAdam:** | 3 | **Lumen maintenance:** | L80B10@50000h |
| **Distribution of light emission:** | Direct | | |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Optional accessories

DROP 28

**008350**

Right

GN1 / Green

**008351**

Left

GN1 / Green

**008352**

Up/Right

GN1 / Green

**008353**

Up/Left

GN1 / Green

**008354**

Down/Right

GN1 / Green

**008355**

Down/Left

GN1 / Green



**008356**

Arrow

GN1 / Green

**008357**

Exit

GN1 / Green

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com