


# SUPERDELTA TONDO

Part number 001720

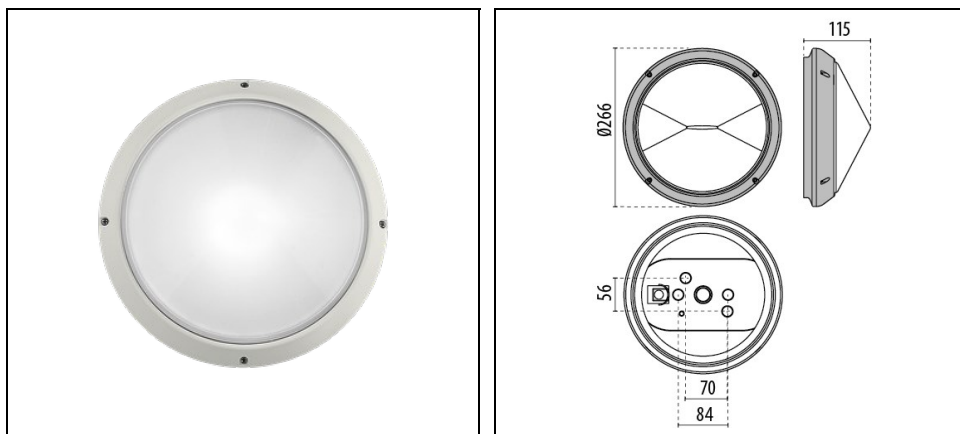

## Description

Wall, ceiling, bracket and post mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing, trim, guard and VISA screen
- Pressed glass diffuser, internally coated
- Class II
- Aluminium reflector for E27 versions
- Foam polymer sealing gasket
- Stainless steel locking hardware
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

|             |          |             |          |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC002892 |
|-------------|----------|-------------|----------|

## General information

|                          |        |                                    |                             |
|--------------------------|--------|------------------------------------|-----------------------------|
| Lampholder:              | E27    | Light source:                      | Incandescent lamps          |
| Luminaire wattage [W]:   | 1x75 W | Colour / Finishing:                | IVORY-10 / Ivory / Textured |
| IP degree of protection: | IP54   | Impact resistance / impact energy: | IK08 5J xx5                 |
| Protection class:        | II     | Optic:                             | S/EW - Symmetric Extra-Wide |
| Net weight [kg]:         | 1.226  | Overall diameter [mm]:             | 266                         |
| Overall width [mm]:      | 116    |                                    |                             |

## Mechanical features

|                    |                                |                      |         |
|--------------------|--------------------------------|----------------------|---------|
| Shape:             | Round $150 \leq x \leq 300$ mm | Housing material:    | Plastic |
| Diffuser material: | Glass                          | Glow wire test [°C]: | 960 °C  |

## Installation


|                                |                  |                                |          |
|--------------------------------|------------------|--------------------------------|----------|
| Application area:              | Outdoor lighting | Mounting type:                 | Bulkhead |
| Min. ambient temperature [°C]: | -30              | Max. ambient temperature [°C]: | 40       |

## Light features

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

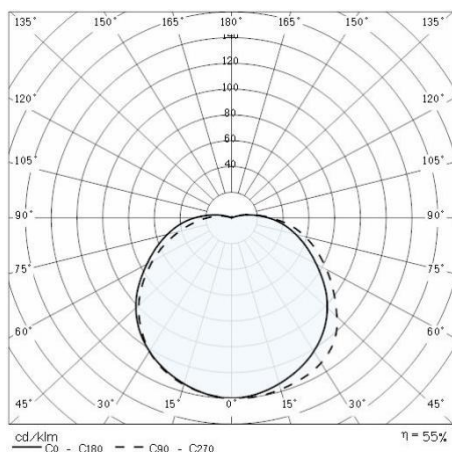

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>