
Busbar terminal

SKL 516

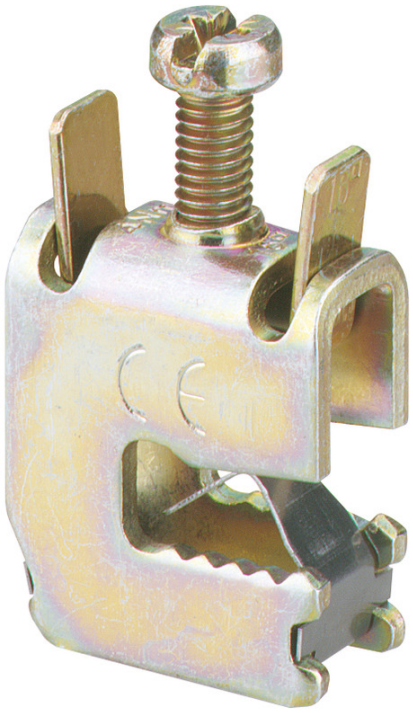

SKL 516

Busbar terminal

Productnumber: 07551601
Dimensions: 12 x 25,5 x 26,5 mm

Bus bar terminals for copper rails 12/20/25/30 x 5 mm

Connection for Cu 1.5-16 mm²

16²

Technical Data

electrical characteristics

Max. conductor cross section:	16 mm²
Rated current:	180 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	1.5 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	1.5 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	16 mm²

Dimensions

Width:	12 mm
Length:	25.5 mm
Height:	26.5 mm
Weight:	0.02 kg

mechanical properties

Connection 1: Tightening moment:	3 Nm

Sales Information

EAN:	4013902051908
ETIM Class:	EC000001
Custom tariff number:	85369010
Minimum order quantity:	1