


CRICKET+ 10 TW C/M MARINE

Part number 3112282

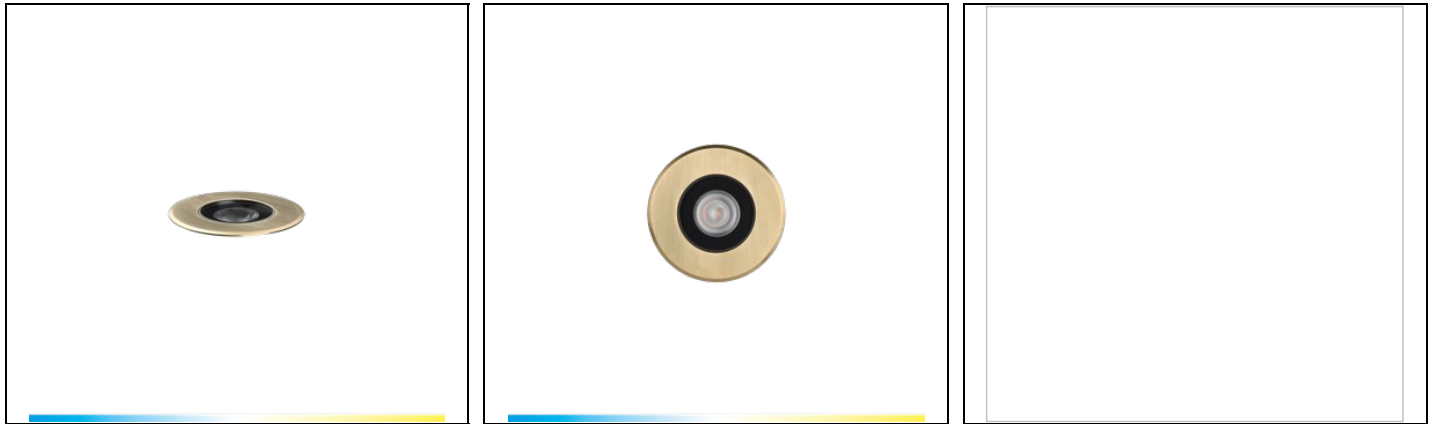

Description

Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Closing ring in marine brass with polished finish ISO 9223 (CX)
- Mains connection through waterproof connection system (WATER-STOP)
- Technopolymer recess box to be ordered separately
- Stainless steel locking hardware
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- DMX signal generator for RGBW and Tunable White versions to be ordered separately
- Tunable White versions to be powered with SELV drivers 48V DC, available as accessories to be ordered separately. Colour management through DMX interface

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC000758
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	440	Luminaire lumen output [lm]:	310
Luminaire wattage [W]:	4.2 W	Luminous efficacy [lm/W]:	74
CRI:	80	Colour temperature [K]:	tw 2700-5700
Colour / Finishing:	BR-10 / Natural brass / Glossy	IP degree of protection:	IP67
Impact resistance / impact energy:	IK08 gJ xx5	Protection class:	III
Optic:	C/M - Circular Medium	Beam angle:	30°
Net weight [kg]:	0.6g8	Overall diameter [mm]:	105
Overall height [mm]:	82		

Mechanical features

Shape:	Round ≤ 150 mm	Housing material:	Aluminium
Diffuser material:	Glass	Glow wire test [°C]:	650 °C
Dinamic load [kg]:	6000	Speed [km/h]:	30
Static load [kg]:	2000	Shear load [kN]:	5
Resistance to torque [Nm]:	50		

Electrical features

Voltage type:	DC	Input voltage [V DC]:	44/52
---------------	----	-----------------------	-------

Installation


Application area:	Outdoor lighting	Mounting type:	Inground
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30
Glass temperature [°C]:	37	Ingounds classification:	A1 A2 A3 A4 A5
Min. distance from lighted object [m]:	0.50		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@140000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

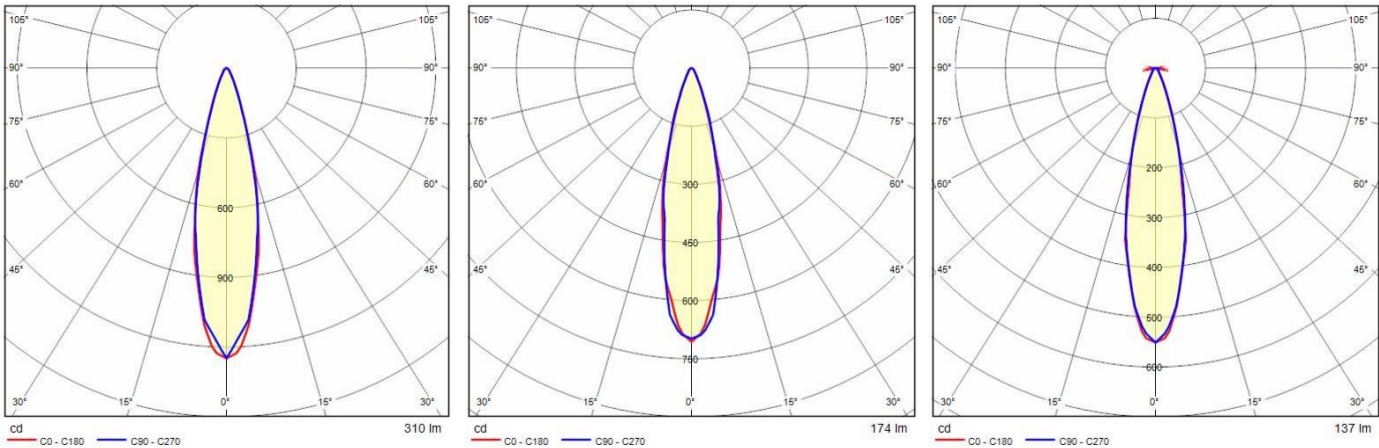

Control gear

CRICKET+ 10 MARINE RGBW / CRICKET+ 10 MARINE TW



310950
Driver - CV 100 W - 48 V kit



310951
Driver - CV 500 W - 48 V kit



3117844
Controller DMX touch white
☐ WH-87 / White



3117845
Controller DMX touch black
☒ BK-81 / Black




3115612
USB key EcoEcco

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Mandatory accessories

CRICKET+ 10 MARINE RGBW / CRICKET+ 10 MARINE TW



3113571

Recessed box CRICKET+ 10 RGBW/TW

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>