


# EKO+21/G

Part number 302045

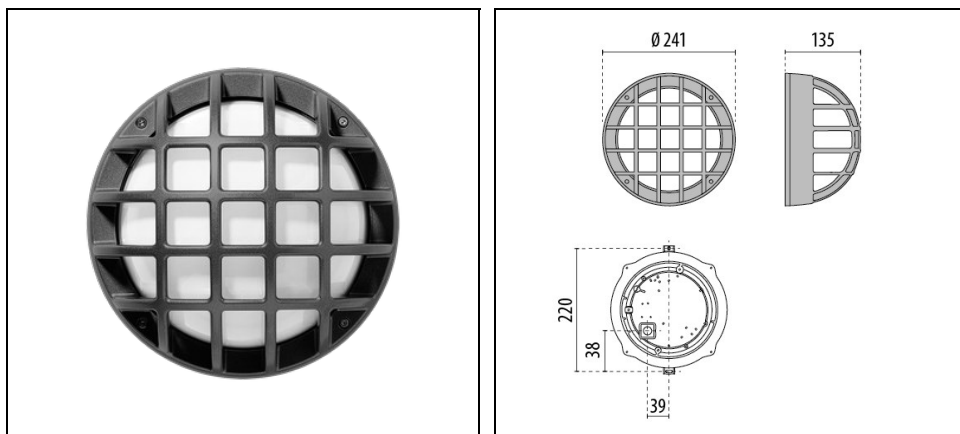

## Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Die-cast aluminium housing, ring and screen, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated
- Aluminium reflector for E27 versions
- EPDM sealing gasket
- Diffuser stays securely hinged to the frame
- No through wiring
- Stainless steel locking hardware
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Product data

|             |          |             |          |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC0028g2 |
|-------------|----------|-------------|----------|

## General information

|                          |        |                                    |                                    |
|--------------------------|--------|------------------------------------|------------------------------------|
| Lampholder:              | E27    | Light source:                      | Incandescent lamps                 |
| Luminaire wattage [W]:   | 1x60 W | Colour / Finishing:                | AN-g6 / Anthracite gray / Textured |
| IP degree of protection: | IP66   | Impact resistance / impact energy: | IK10 20J xx9                       |
| Protection class:        | I      | Optic:                             | S/EW - Symmetric Extra-Wide        |
| Net weight [kg]:         | 1.826  | Overall diameter [mm]:             | 241                                |
| Overall width [mm]:      | 137    |                                    |                                    |

## Mechanical features

|                    |                                |                   |           |
|--------------------|--------------------------------|-------------------|-----------|
| Shape:             | Round $150 \leq x \leq 300$ mm | Housing material: | Aluminium |
| Diffuser material: | Glass                          |                   |           |

## Installation


|                                |                  |                                |          |
|--------------------------------|------------------|--------------------------------|----------|
| Application area:              | Outdoor lighting | Mounting type:                 | Bulkhead |
| Min. ambient temperature [°C]: | -30              | Max. ambient temperature [°C]: | 25       |

## Light features

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

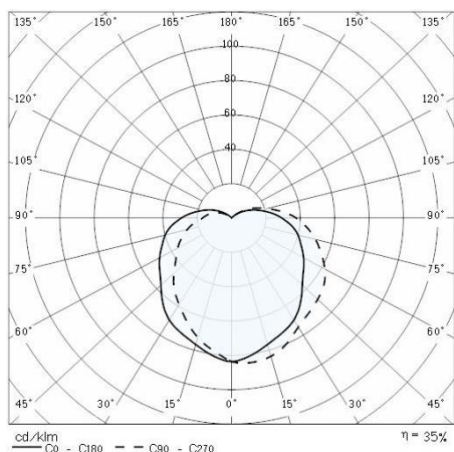

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

For information:  
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**  
Viale del Lavoro 9/11  
37030 Colognola ai Colli Verona - Italy  
Tel. +39 045 61 59 211

[info.it@pil.lighting](mailto:info.it@pil.lighting)  
[www.performanceinlighting.com](http://www.performanceinlighting.com)