

## RSM 4R 24VDC LP GEM.-

**Weidmüller Interface GmbH & Co. KG**



Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image

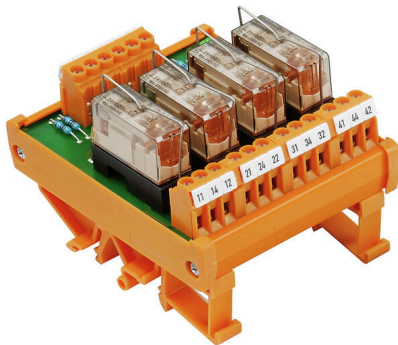

Similar to illustration

Relay bases (RSM) with common positive and negative to be connected to PLC or other type of controllers. The interfaces are made up of groups of 4, 8 or 16 RCL relays (12.7 mm) or RSS (6.1 mm). The connection to the controller can be set up using pluggable connectors or using direct cabling with IEC 60603-13 connectors. Wide range of options:

- 1 or 2 CO contacts with 16/8/6 A relays
- Voltages from 5 to 230 V
- Screw, tension clamp or PUSH IN connection
- Compatible with Weidmüller's solid-state relays

The range of relays provides galvanic isolation between input/output as well as between the adjacent contacts on the relays. This enables the various voltages in the controllers and those required by the various field elements to be safely adapted.

### General ordering data

Version	RSM-Series, Relay module, Number of contacts: 4, CO contact AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 6 A, Screw connection, Test button available: No
Order No.	<a href="#">1112361001</a>
Type	RSM 4R 24VDC LP GEM.-
GTIN (EAN)	4032248047697
Qty.	1 items

**RSM 4R 24VDC LP GEM.-**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Approvals**

Approvals



ROHS Conform

**Dimensions and weights**

Depth	76 mm	Depth (inches)	2.9921 inch
Height	87 mm	Height (inches)	3.4252 inch
Width	75 mm	Width (inches)	2.9527 inch
Net weight	190 g		

**Temperatures**

Storage temperature	-40 °C...60 °C	Operating temperature	-25 °C...50 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

**Environmental Product Compliance**

RoHS Compliance Status	Compliant with exemption		
RoHS Exemption (if applicable/known)	7a, 7cI		
REACH SVHC	Lead 7439-92-1		
SCIP	71d9bdc4-a0b5-4af0-93bd-2ad4e523fb14		

**Rated data UL**

Rated voltage DC UN (input)	24 V	Rated voltage AC UN (output)	250 V
Rated current I <sub>max</sub> (output)	6 A		

**Rating data**

Mechanical service life	30 x 10 <sup>6</sup> switching cycles	Switch-on delay	<8 ms
Switch-off delay	<7 ms		

**Ratings data input**

Power rating	0.45 W
--------------	--------

**Classifications**

ETIM 8.0	EC001437	ETIM 9.0	EC001437
ETIM 10.0	EC001437	ECLASS 14.0	27-37-16-01
ECLASS 15.0	27-37-16-01		