

CXX V 73**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

General ordering data

Version	CUBESERIES, Protective varistor, Rated control voltage: 220...240 V AC, Plug-in connection
Order No.	3053490000
Type	CXX V 73
GTIN (EAN)	4099987023276
Qty.	20 pc(s).

CXX V 73**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	23 mm	Depth (inches)	0.906 inch
Height	9.2 mm	Height (inches)	0.362 inch
Width	12.8 mm	Width (inches)	0.504 inch
Net weight	2 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
---------------------	----------------	-----------------------	----------------

Control side

Rated control voltage	220...240 V AC	Status indicator	none
Protective circuit	Varistor		

General data

Colour	black		
UL94 flammability rating component	Component	Housing	
	UL94 flammability rating	V-2	

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 9.1	27-37-10-10
ECLASS 10.0	27-37-10-10	ECLASS 11.0	27-37-16-92
ECLASS 12.0	27-37-16-92	ECLASS 13.0	27-37-16-92
ECLASS 14.0	27-37-16-92	ECLASS 15.0	27-37-16-92

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format


CXX V 73

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Connection diagram

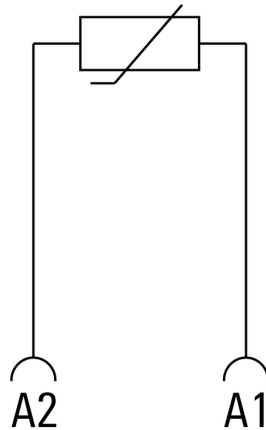

Dimensional drawing

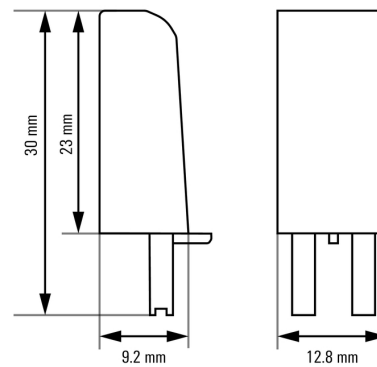

CXX V 73**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Drawings****Miscellaneous****Type code CUBESERIES LED / protective module versions**