

# Data sheet

Page 1/5

## OpDAT Wall-mounted distributor S 6xE2-S APC OS2 Prefab

P/N

1503205906-E

EAN 4251394666402


2026/09/02

Version: F


### Illustrations



Dimensional drawing

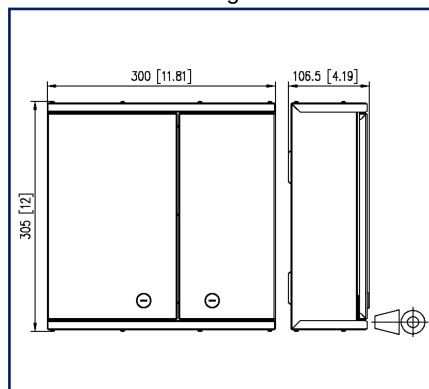

Drill pattern

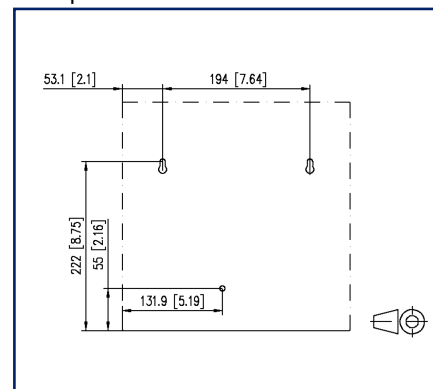

See enlarged drawings at the end of document

### Product specification

- distributor for universal use in floor cabling or as a building distribution point in the equipment room
- equipped with E2-S APC-adapters
- unused openings are closed by blind plugs
- wall-mount housing with two lockable swing doors, two different locks to separate network and building cabling
- easy, space saving wall mounting
- easy access possibilities and a secure routing of the pigtails
- four cable infeeds (scope of supply): 1x for Prefabs with universal cables, 1x for M20/PG16, 2x for patch cords
- variants: size S: 305x300x107 mm or size M: 405x400x107 mm



## Data sheet

Page 2/5

# OpDAT Wall-mounted distributor S 6xE2-S APC OS2 Prefab

P/N

1503205906-E

EAN 4251394666402

2026/09/02

Version: F

## Technical Data

### General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | Wall-mounted distributor                                   |
| Mounting style                                | AP                                                         |
| Transmission technology                       | Fiber optic                                                |
| Port numbering                                | yes                                                        |
| Color                                         | lime green                                                 |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 106.5 mm x 300 mm x 305 mm                                 |
| Dimension (L x W x H)                         | 4.193 in. x 11.811 in. x 12.008 in.                        |
| Fiber class                                   | OS2                                                        |
| Mode type of the fiber                        | Singlemode                                                 |
| Labeling option                               | printed numbers                                            |

### Connections/interfaces

|                                      |                    |
|--------------------------------------|--------------------|
| Connector technology interface 1     | E2000-S Couplers   |
| Connector technology interface 2     | E2000-S Couplers   |
| Number of ports interface 1          | 24                 |
| Number of ports interface 2          | 24                 |
| Number of equipped ports interface 1 | 6                  |
| Number of ports interface 2 equipped | 6                  |
| Cable access/outlet                  | from top or bottom |

### Mechanical data

|                |                 |
|----------------|-----------------|
| Cut-out        | SC, LC-D, E2000 |
| Connector type | simplex         |



## Data sheet

Page 3/5

# OpDAT Wall-mounted distributor S 6xE2-S APC OS2 Prefab

P/N

1503205906-E

EAN 4251394666402

2026/09/02

Version: F

## Technical Data

### Materials and material properties

|                               |                  |
|-------------------------------|------------------|
| Material - Housing            | sheet steel      |
| Material - Housing finish     | powder-coated    |
| Material - Front cover        | sheet steel      |
| Material - Front cover finish | powder-coated    |
| Material - Sleeve             | ceramic, slotted |
| Material - Coupler housing    | Plastics         |
| Halogen free                  | yes              |
| RoHS                          | compliant        |

### Classifications

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001130 |
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 4/5

## OpDAT Wall-mounted distributor S 6xE2-S APC OS2 Prefab

P/N

1503205906-E

EAN 4251394666402

2026/09/02

Version: F

### Accessories

| P/N         | Designation                                                                    |
|-------------|--------------------------------------------------------------------------------|
| 15032Z001-E | Cable infeed for 2xM20 for OpDAT Wall-mounted distributor S                    |
| 15032Z003-E | Cable infeed for 1xM25 for OpDAT Wall-mounted distributor S                    |
| 15032Z004-E | Cable infeed for two mounting plates Prefab for OpDAT Wall-mounted distributor |
| 15032Z005-E | Cable infeed for patch cords for OpDAT Wall-mounted distributor S              |
| 15032Z006-E | Cable infeed for single cable for OpDAT Wall-mounted distributor S             |
| 15032Z089-E | OpDAT WV rotary bolt                                                           |
| 150800119-E | One-Click™ - Cleaner Mini SC/ST/FC/E2000                                       |

# OpDAT Wall-mounted distributor S 6xE2-S APC OS2 Prefab

P/N

1503205906-E


EAN 4251394666402

2026/09/02

Version: F

## Illustrations

Dimensional drawing

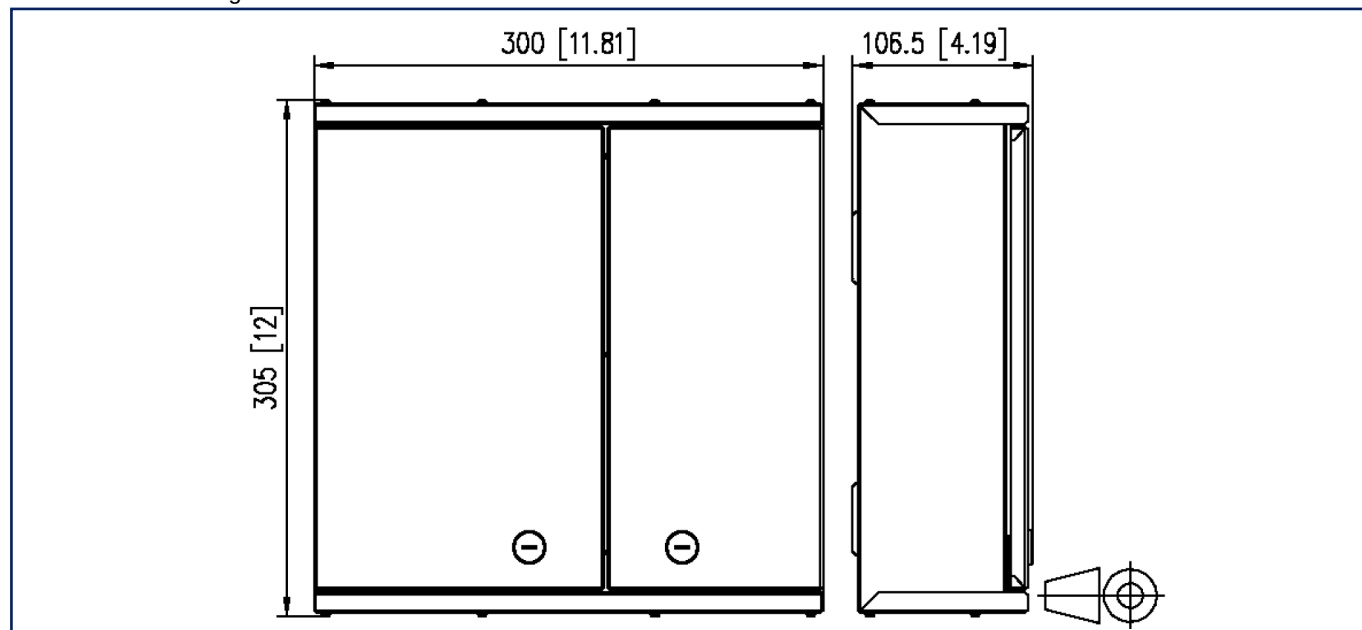

Drill pattern

