
Prism terminal

KPK NH 1

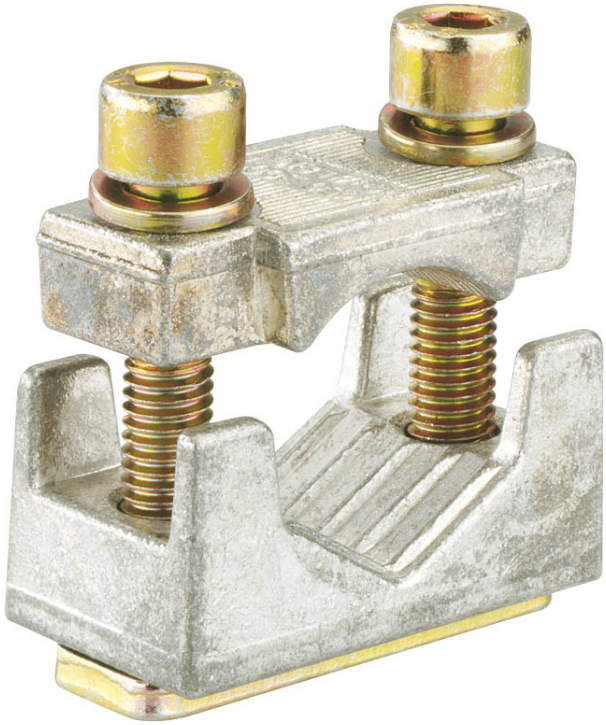

KPK NH 1

Prism terminal

Productnumber: 07673101
Dimensions: 27 x 20 x 21 mm

Prism terminal for the connection of aluminium and copper conductors to NH-switchgear in GTi enclosures (GTS, GTT, GSS, GST)

For AL/CU conductor 1x (10-150), Alu conductor see technical annex, set = 3 pieces

Technical Data

electrical characteristics

Rated connecting capacity:	150 mm²
Rated current:	250 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Strip length:	22 mm
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	25 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	150 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	25 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	150 mm²

Dimensions

Width:	27 mm
Length:	20 mm
Height:	21 mm
Weight:	0.3055 kg

mechanical properties

Connection 1: Tightening moment:	4.5 Nm

Sales Information

EAN:	4013902566846
ETIM Class:	EC002498
Custom tariff number:	85369010
Minimum order quantity:	1