

SAISGP-P-5L-8/13.5-M12**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Your peripheral devices should be supplied with greater power. With our new M12 plug-in connector, more than 250 V and 2 A is possible without problems. The compact A-, K-, L-, S- and T-coded M12 plug-in connectors are designed for the transmission of up to 630 V AC or 60 V DC and 12 A.

General ordering data

Version	Field attachable connector, M12
Order No.	3119500000
Type	SAISGP-P-5L-8/13.5-M12
GTIN (EAN)	4099987254168
Qty.	1 items

SAISGP-P-5L-8/13.5-M12

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Width	69 mm	Width (inches)	2.7165 inch
Diameter	23 mm	Net weight	90 g

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption
 REACH SVHC No SVHC above 0.1 wt%

Technical data customisable plug-in connectors

Number of poles	5		
Coding	L-coded		
Contact surface	Ni/Au		
Type of connection	PUSH IN		
Housing main material	zinc diecast nickel-plated, PA 66		
Cable diameter, max.	13 mm		
Cable diameter, min.	8 mm		
Contact material	CuSn		
Conductor cross-section, max.	2.5 mm ²		
Conductor cross-section, min.	1.5 mm ²		
Nominal current	16 A		
Protection degree	IP67		
Plugging cycles	≥ 100		
Pollution severity	3		
Gender of contact	Male		
Rated voltage	Rated voltage	63 V	
	Voltage type	DC	
Shield connection	No		
Threaded ring material	Diecast zinc		
Temperature range of housing	-40 ... +85 °C		

General Info

Number of poles	5	Connection 1	M12
Connection 2	PUSH IN	UL 94 flammability rating	V-0
Housing main material	zinc diecast nickel-plated, PA 66	Connection thread	M12
Contact material	CuSn	Contact surface	Ni/Au
Wire cross-section, solid, min. (AWG)	AWG 16	Wire cross-section, solid, max. (AWG)	AWG 14
Wire connection cross section, finely stranded, min.	1.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	1.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 mm ²
Wire cross-section, solid, min.	1.5 mm ²	Wire cross-section, solid, max.	2.5 mm ²
Wire cross-section, finely stranded, min. (AWG)	AWG 16	Wire cross-section, finely stranded, max. (AWG)	AWG 14
Shielding	No	Protection degree	IP67
Plugging cycles	≥ 100		

SAISGP-P-5L-8/13.5-M12

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Standards

Connector standard	IEC 61076-2-111
--------------------	-----------------

Classifications

ETIM 8.0	EC002635	ETIM 9.0	EC002635
ETIM 10.0	EC002635	ECLASS 14.0	27-44-01-16
ECLASS 15.0	27-44-01-16		


SAISGP-P-5L-8/13.5-M12

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Dimensioned drawing

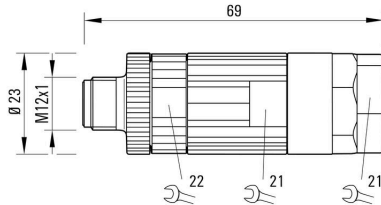

Pole scheme

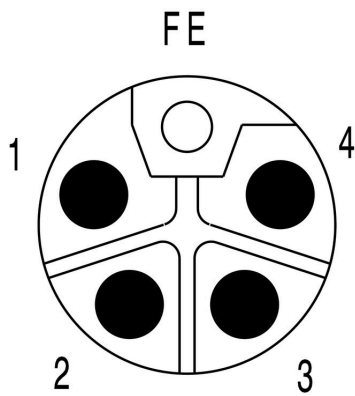

SAISGP-P-5L-8/13.5-M12

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

